


TER
Transformers

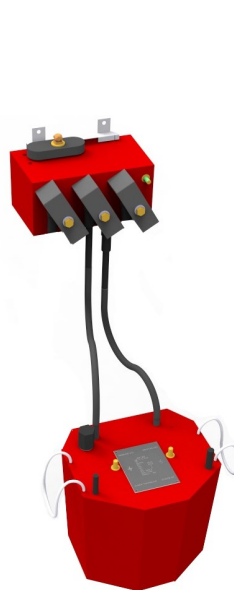

MODULO
Transformers

IP68 WATERTIGHT TRANSFORMERS


950 V - 3200 V - 5500 V - 6600 V networks

Product leaflet

- ✓ Recommended for underground installations
- ✓ Immersible and non-corrodible substations
- ✓ Integrated electrical protections
- ✓ Robust and long lasting
- ✓ Dry or vegetable oil transformers depending on power rating



MADE IN
FRANCE

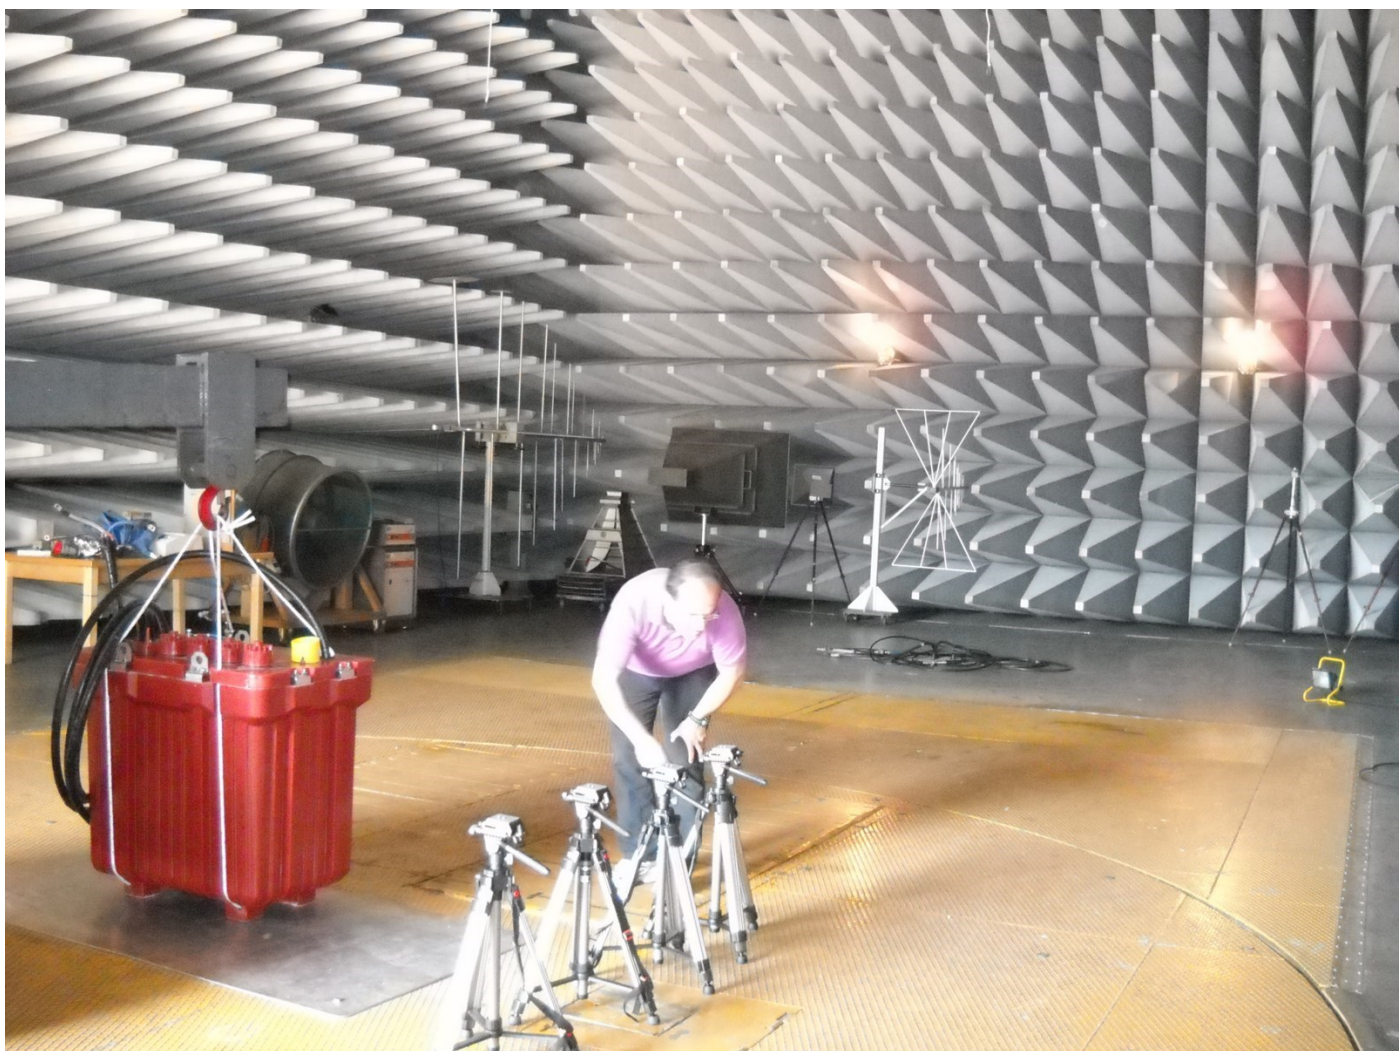

Watertight transformers, IP68, resistant to severe weather conditions, designed to function in hostile conditions, underground transformers in pit or in outdoor cabinet. Transformers are tested and conform to the standards NF C52-410.

OVERVIEW	4
APPLICATIONS	5
LIST OF SUBSTATION MODELS	6
SAMPLE PROJECTS	7
TER TRANSFORMERS	
<i>Transformers</i>	8-11
<i>Network accessories</i>	12-13
<i>Spare parts</i>	14-15
MODULO TRANSFORMERS	
<i>Transformers</i>	16-19
<i>Network accessories</i>	20-22
<i>Spare parts</i>	23
LOW-VOLTAGE CABINET IP67	24
INTERVENTION ACCESSORIES FOR THE NETWORK	25-26
WATERTIGHT LIGHTING ARRESTERS	27
CONCRETE PITS FOR WATERTIGHT TRANSFORMERS	28
INTERLOCKING	29-30
CONNECTING TOOLS	31
VOLTAMAX	32-33
RECOMMENDED CABLES	34-35

Abbreviations

LV	Low voltage
MLV	Maximum low voltage – 950 V
MV	Medium voltage — 3200 to 6600 V

TRANSFORMERS INSTALLED IN A PIT

- Watertight and submergible transformers
- Non-corrodible transformer, unchanging over time
- Connectors adapted for all types of cables
- Easy installation



IP 68

ECO RESPONSIBLE TRANSFORMERS

- Low-loss transformers, complying with EU recommendations 548/2014 2021, aimed at reducing CO2 emissions
- AUGIER oil transformers are removable, repairable with a long lifespan
- Vegetable oil cooled transformers, 98% biodegradable oil in 21 days



NETWORK AND TRANSFORMERS PROTECTION

- MV or MLV protection by accessible fuses
- Transformer protection by thermal probe
- Low voltage protection by circuit breaker or fuse

LARGE RANGE OF TRANSFORMERS

- Power rating from 1 to 160 kVA
- Single- or three-phase coupling
- Step-up or step-down transformers
- Voltage: 950 V, 3200 V, 5500 V, 6600 V

APPLICATIONS

WATERTIGHT TRANSFORMERS




Lighting

Lighting supply for roads, bypasses, industrial zones, tunnels, bridges



Roadway equipment

Supply to dynamic equipment (camera, variable messaging boards, radar, vehicle counting)

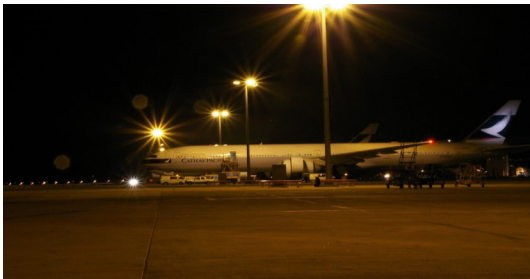

Airports

Supply to Nav aids equipment (Glide, VOR, DME, Localizer) and lighting for airplane parking, access roads, fencing



Military

Supply for surveillance devices, identified targets, gates



Power plants

Supply for security lighting, remote buildings, motorized doors, pumps, measuring equipment



Railways

Supply for GSM-R communications materials, instrumentation, and lighting of emergency outlets in tunnels



Recreational sites

Power for parking and access lighting



Oil & Gas

Supply for instrumentation and cathodic protection

Augier's watertight transformers are made of resin epoxy for power ratings up to 32 kVA. Resin epoxy guarantees non-corrosive transformers that do not change over time. They are watertight and submersible, insulating, and can be buried in a pit.

Main characteristics:

- Protection grade : IP 68 – IK 10
- Operating temperatures : - 15 degrees C to + 40° C (+55°C on demand)
- Industrial frequencies : 5.5 kV : 22 kV – 50 Hz – 1 minute
: 3.2 kV : 16 kV – 50 Hz – 1 minute
: 950 V : 3 kV – 50 Hz – 1minute
- Specially designed to support the stress of discharge lamps

TRANSFORMERS		TER	MODULO
Operating voltage	950 V	x	x
	3200 V	x	x
	5500 V	x	x
	6600 V	x	x
Power rating	Single phase	1 à 32 kVA	1 à 32 kVA
	Three phase	5 à 160 kVA	5 à 160 kVA
Dielectric	Oil	x	8 à 160 kVA
	Dry		1 à 6 kVA
MV connection	On the transformer	x	
	Separate from the transformer		x
LV connection	On flexible cable	Length 4 meters	Length 4 meters
Tap changer	+ - 5%	Included	Included from 8 kVA
MV Protection	By HRC fuse	x	x
Thermal protection	By threshold probe	Included	Included
LV protection	By fuse	Optional, in a separate cabinet	Optional, in a separate cabinet
	By circuit breaker and MX coil	Optional, in a separate cabinet	Optional, in a separate cabinet
Interlocking	By special nut	Optional	Optional

Compliance with the following standards:

Our transformers comply with the following standards and regulations:


- NC C52-410 : Transformers for outdoor lighting
- IEC 76 : Power rating transformers
- NF C20-010 – IEC 60 529 : Degree of protection for enclosures (IP)
- NF C17-200 : Rules for road lighting systems
- UE No. 548/2014 : European Directive ECODESIGN 2021

Operating conditions:

Environmental class AD7: can be completely or partially submerged in water, temporarily.

SELECTED PROJECTS

WATERTIGHT TRANSFORMERS

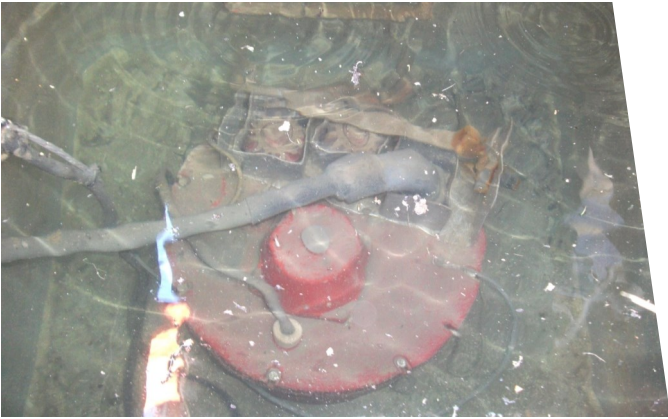

Railway, France, tunnel lighting supply



Tunnel, Spain, lighting and outlet supply



Airport, Middle East, Nav aids supply



Large sites, France, car park lighting



Airport, Middle East, lighting supply



Highway, Middle East, lighting



Military, France, shooting range supply (targets)




Roads, China, lighting supply

TER

From 1 to 160 kVA - 950 V, 3200 V, 5500 V, 6600 V

WATERTIGHT TRANSFORMERS

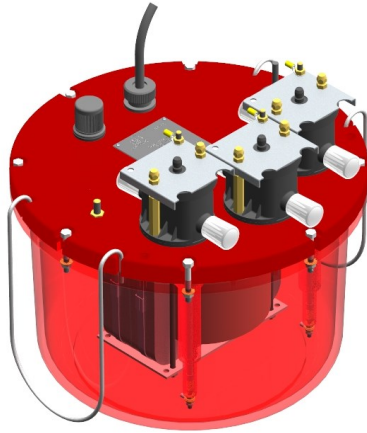

TER MT

TER network connection

- A system of one-pole disconnectable terminals incorporated in the transformer guarantees complete operational flexibility
- Easy to connect and disconnect
- For recommended cable type, Augier supplies the necessary equipment to connect to the one-pole terminals
- The “T” transformers allow section isolation by disconnecting the shunt located on the terminal
- For TER MT, the two external terminals are active and the middle terminal ensures continuity of the network

TER low voltage connection

- The low voltage output is standard with H 07 RNF cable


TER transformers and network protections

- The HRC fuses are easily accessible and directly incorporated in the transformer connection terminal

Advantages of TER transformers

- Watertight transformers, IP68, can be buried in an accessible pit
- Finished in epoxy resin up to 32 kVA
- Full line of equipment for no-voltage check, conforms to NF C17-200 standards and available on demand
- Thermal protection by probe, output on cable H07 RNF 2 x 1.5 mm², length 4 meters. Thermal probe with closing, 110 degrees C – 2A – 250 V
- Voltage adjusting tap changers of +/- 5% available on full TER line

Optional features

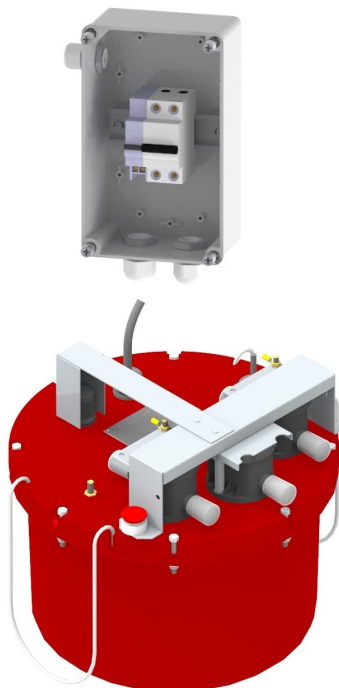

- Low voltage protection:
 - IP67 cabinet equipped with a circuit breaker, providing protection against short circuits. Circuit breaker offers the thermal protection of the transformer, guaranteeing absence of defects. Cabinet is separate from transformer (see page 24 for details).
 - IP67 cabinet also equipped with low voltage fuses
- Terminal interlocking by nut (see detail pages 29-30)
- 6 meter low voltage connection cable
- For 950 V transformers, 950 V connection cable H07 RNF, 4 meters long

Options — TER for single- or three-phase network

Network \ Transformer	TER MM	TER MT	TER TT
Single phase	From 1 to 32 kVA	-	-
Three phase	-	From 1 to 25 kVA	From 5 to 160 kVA

TER MM : Single-phase transformer for single-phase network
TER MT : Single-phase transformer for three-phase network
TER TT : Three-phase transformer for three-phase network

Technical characteristics:

Transformers made of Araldite resin up to 32 kVA, and metallic cuve from 50 to 160 kVA
 Corrosion resistant, water-resistant, disconnectable, can be buried in accessible pits
 Protective grade : IP 68
 Primary voltage : 950 V, 3200 V, 5500 V, 6600 V
 Primary insulation voltage : 1.1 kV, 3.6 kV, 7.2 kV
 Secondary no load voltage : 237 V single phase, 410 V three phase + neutral
 Secondary insulation voltage : 1.1 kV
 Coupling : Single-phase li0 or three-phase Yzn11, Dyn 11, from 63 kVA
 Dielectric : oil
 Comply with the following standards NF C52-410, IEC 76, Eco design 2021

Connection:

- T connection on the transformer
- One-pole disconnectable terminals, for section cables from 6 to 50 mm²
- Low voltage output on a two-pole cable H 07RN F for the TER MM and MT 1 to 25 kVA on two H 07 RN F one-pole cables for TER 32 kVA, on a five-pole for the TER TT. Cable available from 4 meters, choices available in table on page 11.

Protection :


MV : By 1 fuse in for TER MM, 2 fuses for TER MT, or three fuses for TER TT
LV : Delivered without protection, low voltage protection is installed in a separate cabinet

Electric positions :

MV : Winding isolated from the eath
 Upon request for the TER MM: winding end corresponds to the cable periphery conductor (neutral), grounding
LV : A low voltage winding extremity joined to the earthing terminal (blue conductor). Neutral low voltage connected to the ground
 Upon request: Low voltage isolated or connected to the ground by the middle winding point; in either case low voltage protection must be bipolar

Equipment: delivered with the transformer

- Low voltage connection accessories to be assembled
- An M10 ground terminal rod, internally connected to the magnetic circuit
- Lifting ropes or lifting rings
- Signal panel
- Instructions for assembling disconnectable plugs

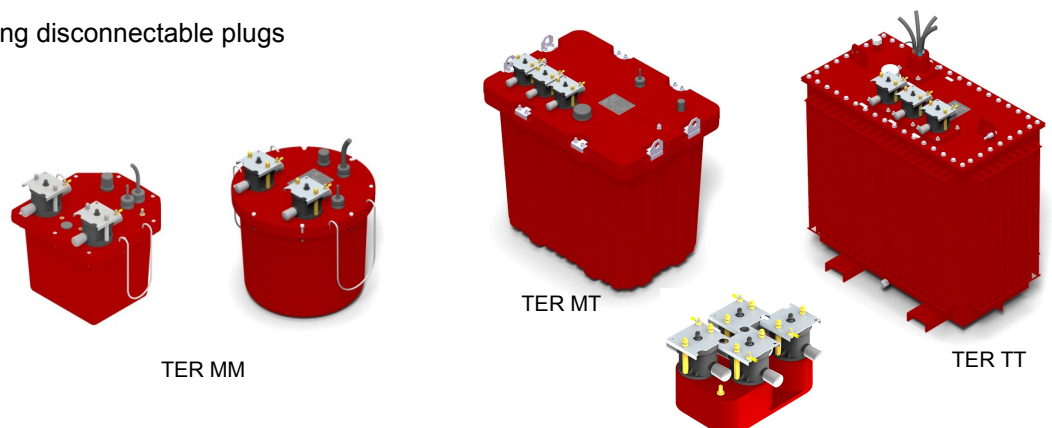

TER MM 1 to 32 kVA and TER MT 1 to 25 kVA											
Electrical characteristics	Nominal power rating (kVA)	1	2	3	5	6	8	10	16	25	32
	Power rating (kVA) (1)	0.8	1.6	2.4	4	4.8	6.4	8	12.8	20	25.6
	Fuse rating 950 V (A)	8	12	12	20	20	25	32	40	63	80
	Fuse rating 3 à 3.3 kV (A)	5	8	8	12	12	16	16	20	20	32
	Fuse rating 5.5 à 6.6 kV (A)	4	4	4	4	4	12	12	12	16	-
	Iron losses (W)	20	30	45	60	65	100	110	100	130	155
	Copper losses (W)	26	38	45	75	90	115	130	360	580	600
	Short-circuit voltage (%)	2.9	2.5	2.5	2.5	3	3	3	5.5	5	5
	Voltage drop (%) $\cos \varphi = 1$	2.6	1.91	1.52	1.52	1.86	1.47	1.34	2.3	2.42	1.98
	Voltage drop (%) $\cos \varphi = 0.8$	2.84	2.49	2.4	2.4	2.89	2.73	2.66	4.81	4.51	4.28
	Magnetizing current (%)	9	8.5	8	8	7	6	5	6	5	3.1


TER TT 5 to 100 kVA 950 V - TER TT 5 to 160 kVA 3 kV to 6.6 kV													
Electrical characteristics	Nominal power rating (kVA)	5	10	16	25	32	50	63	80	100	125	160	
	Power rating (kVA) (1)	4	8	12.8	20	25.6	40	50.4	64	80	100	128	
	Fuse rating 950 V (A)	10	20	32	40	50	80	80	100	125	-	-	
	Fuse rating 3 à 3.3 kV (A)	12	12	16	16	40	40	50	63	63	80	100	
	Fuse rating 5.5 à 6.6 kV (A)	12	12	8	8	20	20	32	32	32	50	63	
	Coupling	Yzn11	Yzn11	Yzn11	Yzn11	Yzn11	Yzn11	Yzn11	Dyn11	Dyn11	Dyn11	Dyn11	Dyn11
	Iron losses (W)	85	90	120	130	180	200	280	295	320	375	395	
	Iron losses (W) (2)	<63	<63	<63	63	68	81	93	110	130	153	189	
	Copper losses (W)	100	290	390	700	750	780	850	1080	1330	1700	2350	
	Copper losses (W) (2)	100	300	400	600	630	750	880	1020	1250	1440	1750	
	Short-circuit voltage (%)	2.3	3.5	3.5	4	3.5	3.5	3.5	3.5	3.5	4	4	4
	Voltage drop (%) $\cos \varphi = 1$	2.1	2.92	2.3	2.84	2.4	1.65	1.5	1.45	1.6	1.7	1.75	
Voltage drop (%) $\cos \varphi = 0.8$	2.4	3.5	3.4	3.96	3.4	3.1	3	2.8	3.7	3.6	3.5		
Magnetizing current (%)	9	5.5	4	3	3.5	2.8	2.6	2.6	2.4	2.2	2.1		

- (1) For road lighting, discharge lamps, complying with NF C 52-410
 (2) Compliance with EcoDesign regulation N°548/2014 - 2021

TER MECHANICAL CHARACTERISTICS

WATERTIGHT TRANSFORMERS

TER MM 1 to 32 kVA - TER MT 1 to 25 kVA											
Mechanical characteristics	Nominal power rating (kVA)	1	2	3	5	6	8	10	16	25	32
	Length (mm)	400	400	400	400	Ø500	Ø500	Ø500	660	930	930
	Width (mm)	420	420	420	420	Ø500	Ø500	Ø500	540	655	655
	Height on terminals (mm)	440	440	440	440	552	552	552	750	950	950
	Total weight (kg)	65	65	70	75	100	125	130	250	375	380
	Weight of oil filling (kg)	17	16	16	15	20	19	18.5	35	80	100
	LV cable cross section (mm ²)	6	6	6	6	6	10	10	25	35	50




TER MM
1-5 kVA



TER MM
6-10 kVA



TER MM
16 kVA




TER MM
25-32 kVA




TER MT
1-5 kVA



TER MT
6-10 kVA




TER MT
16 kVA




TER MT
25 kVA


TER TT 5 to 160 kVA												
Mechanical characteristics	Nominal power rating (kVA)	5	10	16	25	32	50	63	80	100	125	160
	Length (mm)	660	660	930	930	930	1042	1090	1090	1090	1122	1122
	Width (mm)	540	540	655	655	655	545	595	595	595	627	627
	Height on terminals (mm)	750	750	950	950	950	1029	1129	1129	1129	1129	1229
	Total weight (kg)	260	260	400	410	420	550	730	750	780	830	900
	Weight of oil filling (kg)	40	45	160	160	140	250	150	280	160	210	210
	LV cable cross section (mm ²)	6	6	16	25	25	35	35	35	50	70	70



TER TT
5-10 kVA




TER TT
16-25-32 kVA




TER TT
50-160 kVA

Connection box


Our line includes two types of connection boxes: one offering one input- three outputs for single or three-phase networks, and the other offering one input - one output. The latter model can be used as an end cap or junction box, or to guarantee network continuity.




Box 1A
Box 1A/ 1D
(for single-phase network)



Box 1A/ 1, 2 or 3D
(for single-phase network)



Box 1A - 1A/ 1D
(for three-phase network)

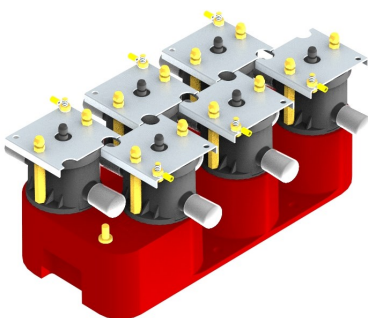

Box 1A / 2 or 3D
(for three-phase network)

Connection box

Cast in Araldite resin, corrosion resistant, watertight, disconnectable, and can be buried in accessible pits.

- Insulation voltage : 7.2 kV
- Operating voltage : 950 V to 6600 V
- Maximum current : 80 A
- Protection grade : IP68

Connection

The boxes comprise disconnectable terminals receiving a cable of 6 to 50 mm².

They are delivered with the necessary equipment for the cable heads.

Operating conditions


AD7 environmental operating class: the boxes can partially or totally submerged in water for limited periods of time.

Mechanical characteristics					
Type	Network	Length	Width	Height	Weight
1A or 1A / 1, 2 or 3D	Single phase	342 mm	228 mm	218 mm	15 kg
1A or 1A / 1D	Three phase	342 mm	228 mm	218 mm	15 kg
1A / 2 or 3D	Three phase	495 mm	230 mm	218 mm	32 kg

TER continuity plug

Waterproof plug

The plug isolates a TER terminal one-pole, allowing network continuity when the terminal TER is disconnected.

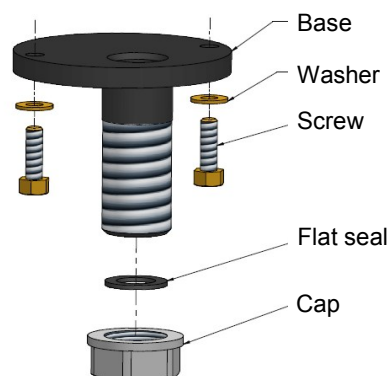

Overview

This terminal allows connection of numerous cables:
3200 V, 5500 V, 6600 V network:

- Belted cable
- Radial field cable
- One-pole twisted cable
- Two-pole cable

950 V network:

- U 1000 R2V cable or other

The terminal consists of two parts:
The socket, integrated with the TER
Plug to connect to the cable, designed to receive all types of cables from 6 to 50 mm²

Electrical characteristics

The terminal allows maximum transportation of 80 A.
The one-pole terminal was designed to maintain 7.2 kV and support all anticipated UTE tests

Mechanical characteristics


The sealing ring accommodates cables with a maximum sheath diameter of 19.5 mm

Connection

Par By cooper crimp terminal

Please specify in the order:

- Cable type and cross section
- For special cable types, please supply a sample

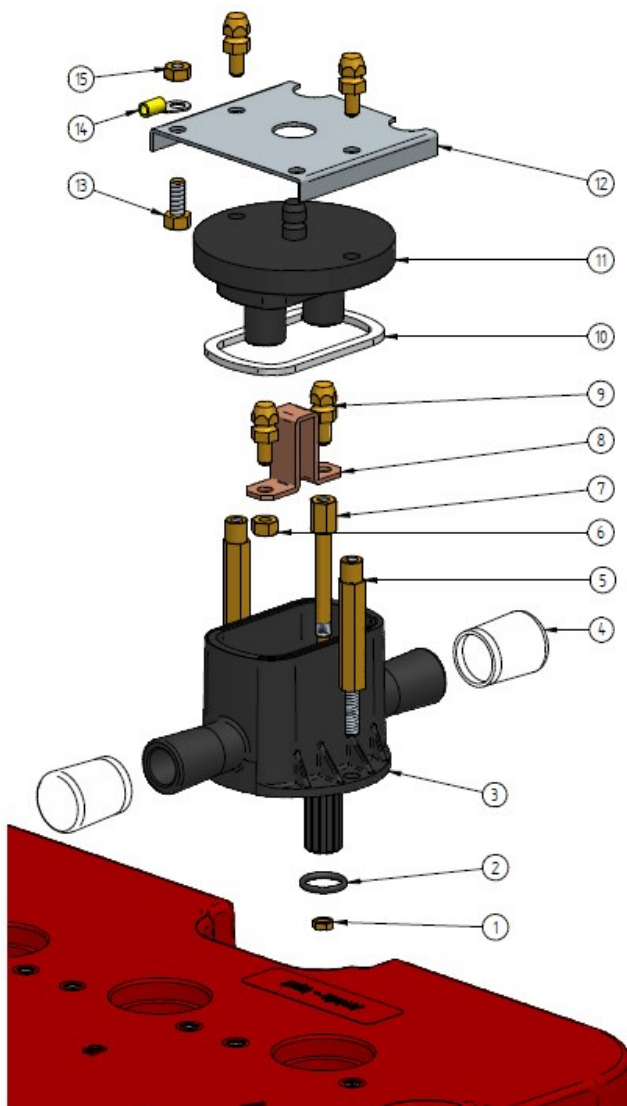

Protection against water leaks

The terminal offers three levels of protection:

- Between the enclosure (3) and the transformer cover by o-ring seal (2)
- Between the enclosure (3) and the cover (11) by soft seal (10)
- Between the cable and the enclosure (3) by thermo-retractable sleeve
- thermo-rétractable












1. B.3P Phase contact nut
2. D:18.64x3.53 o-ring
3. Disconnectable box
4. GPN Kapsto cap, watertight for storage
5. Spacer
6. HH M8 brass nut
7. Contact plug-in
8. Jumper
9. Screw gripper
10. Flat sealing junction box
11. Lid
12. Reinforced sheet lid
13. HU M8 brass screw*
14. Yellow 6 D8 round terminal*
15. HH M8 brass nut*


* Not supplied

Sealing kit for one transformer						
Part number		TER single phase		TER three phase		
	Two pole cable 3.6/6 kV	30 13213				
	One pole cable 3.6/6 kV	30 13214			30 13215	
	Three pole cable 6/6 kV				30 13212	
	Airfield cable	30 13217			30 13218	
	U1000 R2V cable	30 13216			30 13219	
Bag of 6 thimbles						
Cross cable section	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²
6 thimbles part numbers	30 13430	30 13431	30 13432	30 13433	30 13434	30 13435

We recommend replacing the seals after disassembling to guarantee water-resistant protection.




Part number	Designation	Product
30 12968	Kit cover	
30 12712	Kit housing	
30 12969	Kit seal	
30 11239	Jumper + screw kit	
30 13054	Brace + screw kit	
30 11235	Sealing cap TER MM	
30 11865	Sealing cap TER T	
10 24354	Seal for fuse terminal	
10 23765	Fuse removal tool for 10x180 fuse	
10 24130	Fuse removal tool for 36x190 and 36x250 fuse	
30 10902	Fuse removal tool for 20x127 fuse	

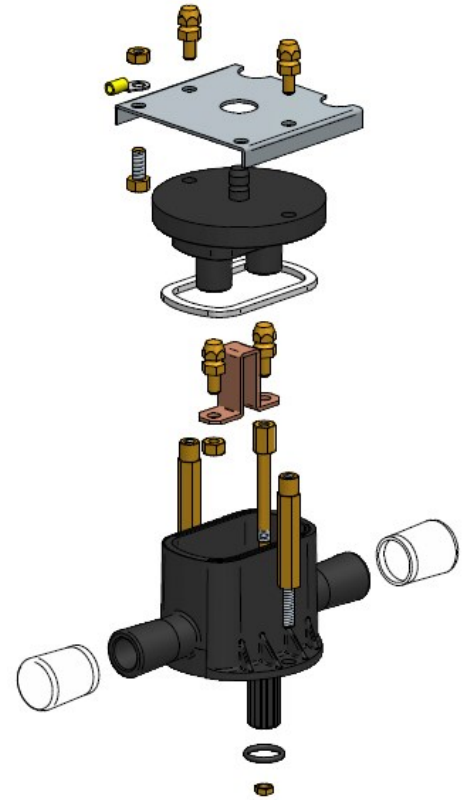

MODULO

FROM 1 To 160 kVA - 3200 V, 5500 V, 6600 V

WATERTIGHT TRANSFORMERS

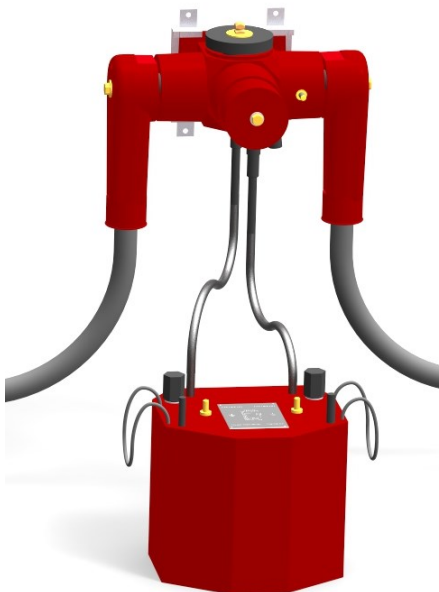

Modulo TRI

MODULO overview and connection network

- MODULO Consists of an IDR connection interface and a watertight transformer
- The IDR connection interface is separate from the transformer and guarantees highly flexible operation and network connection
- The IDR is connected to the transformer by flexible cables equipped with a one-pole plug manufactured in-house
- To connect the network cable to the IDR, Augier provides the necessary equipment adapted to high voltage
- The TEE transformers are dry type, while the TED-E are oil type

MODULO low voltage connection

- The low voltage output is standard with H 07 RNF cable


MODULO transformers and network protection

- The high tension fuses are installed in the back of the transformer and easily accessible
- The thermal probe protects the transformer from surcharges

Advantages of MODULO transformers

- Watertight transformers, IP68, can be buried in an accessible pit
- No-voltage verification is carried out in the IDR in a dedicated compartment
- From the 8 kVA single phase and for the full three-phase line, the transformers are equipped with tap changers +/- 5%

Optional functions

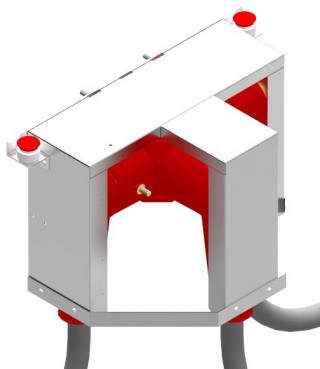

- Low voltage protection:
 - IP67 cabinet equipped with a circuit breaker, providing protection against short circuits. Circuit breaker offers the thermal protection of the transformer, guaranteeing elimination of defects. Cabinet is separate from transformer (see page 24 for details).
 - IP67 cabinet also equipped with low voltage fuses
- Terminal interlocking by nut (see detail pages 29-30)
- Transformer fuse terminal interlocking by nut
- 6-meter low voltage connection cable

OPTIONS - MODULO for single or three-phase network

Network \ Transformer	Modulo BI TEE or TED-E MM	Modulo TRI TEE or TED-E MT	Modulo TRI TED-E TT
Single phase	From 1 to 32 kVA	-	-
Three phase	-	From 1 to 25 kVA	From 5 to 160 kVA

Modulo BI:

Single-phase transformer and interface for IDR connection for single-phase network

Modulo TRI :

Single-phase or three-phase transformer and IDR TRI interface connection for three-phase network

Technical characteristics:

Transformers made of Araldite resin up to 32 kVA, and metallic tank from 50 to 160 kVA
 Corrosion resistant, water-resistant, disconnectable, can be buried in specially designed pits
 Protective grade : IP 68
 Primary voltage : 3200 V, 5500 V, 6600 V
 Primary insulation voltage : 3.6 kV, 7.2 kV
 Secondary empty voltage : 237 V single phase, 410 V three phase + neutral
 Secondary insulation voltage : 1.1 kV
 Coupling : Single-phase or three-phase Yzn11, Dyn11 from 63 kVA
 Dielectric : Dry or oil depending on voltage
 Comply with the following standards NF C52-410, IEC 76, Eco design

Connection:

- Bypassing on the IDR connection interface
- Removable high voltage terminals for section cable from 6 to 35 mm²
- Low voltage output on a two-pole cable H 07RN F for the single-phase transformers 1 to 25 kVA; on two H 07 RNF one-pole cables for the 32 kVA single-phase transformer, on a five-pole for the three-phase transformer. Cable available from 4 meters, choices available in table on page 19

Protection :

MV: By one fuse for TEE and TED-E, two fuses for TEE and TED-E MT, or three fuses for TED-E TT for high breaking capacity.


LV: Delivered without protection, low voltage protection is installed in a separate cabinet

Electric positions:

- **MV:** Winding isolated from the earth
 Upon request for the Modulo BI: neutral grounding on the IDR connection interface
- **LV:** A low voltage winding extremity joined to the earthing terminal (blue conductor). Neutral low voltage connected to the ground
 Upon request: Low voltage isolated or middle winding point connected to the ground, In either case low voltage protection must be bipolar

Equipment delivered with the transformer:

- Low-voltage connection accessories to be assembled
- Stainless steel support plate for mounting the IDR on the viewing panel
- An M10 ground terminal rod, internally connected to the magnetic circuit and on the IDR
- Lifting ropes or lifting rings
- Signal panel
- Instructions for assembling disconnectable plugs

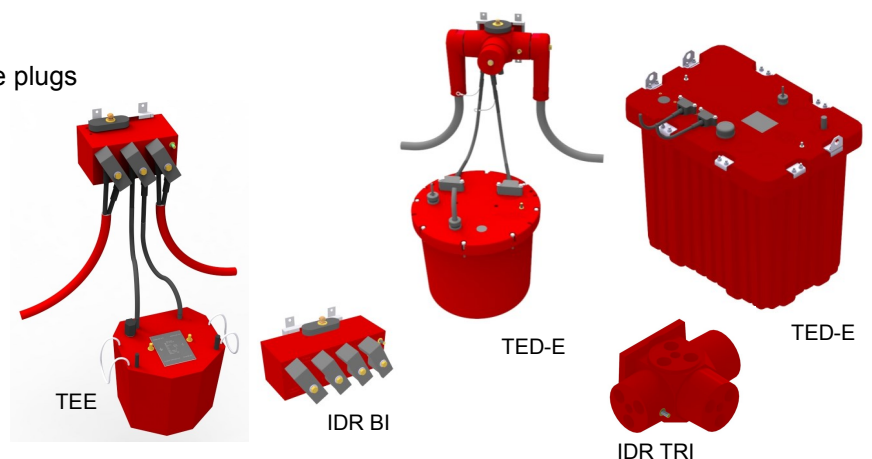

MODULO BI: TEE or TED-E MM 1 to 32 kVA and MODULO TRI: TEE or TED-E MT 1 to 25 kVA										
Nominal power rating (kVA)	1	2	3	5	6	8	10	16	25	32
Type of transformer	TEE	TEE	TEE	TEE	TEE	TED-E	TED-E	TED-E	TED-E	TED-E
Power rating (kVA) (1)	0.8	1.6	2.4	4	4.8	6.4	8	12.8	20	25.6
Fuse rating 950 V (A)	-	-	-	-	20	25	32	40	63	80
Fuse rating 3 to 3.3 kV (A)	5	8	8	12	12	16	16	20	20	32
Fuse rating 5.5 to 6.6 kV (A)	4	4	4	4	4	12	12	12	16	-
Iron losses (W)	20	30	45	60	65	100	110	100	130	155
Copper losses (W)	26	38	45	75	90	115	130	360	580	600
Short-circuit voltage (%)	2.9	2.5	2.5	2.5	3	3	3	5.5	5	5
Pressure drop (%) $\cos \varphi = 1$	2.6	1.91	1.52	1.52	1.86	1.47	1.34	2.3	2.42	1.98
Pressure drop (%) $\cos \varphi = 0.8$	2.84	2.49	2.4	2.4	2.89	2.73	2.66	4.81	4.51	4.28
Magnetizing current (%)	9	8.5	8	8	7	6	5	6	5	3.1

MODULO TRI: TED-E TT 5 to 160 kVA											
Nominal power rating (kVA)	5	10	16	25	32	50	63	80	100	125	160
Type of transformer	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E	TED-E
Power rating (kVA) (1)	4	8	12.8	20	25.6	40	50.4	64	80	100	128
Fuse rating 950 V (A)	10	20	32	40	50	80	80	100	125	-	-
Fuse rating 3 to 3.3 kV (A)	12	12	16	16	40	40	50	63	63	80	100
Fuse rating 5.5 to 6.6 kV (A)	12	12	8	8	20	20	32	32	32	50	63
Coupling	Yzn11	Yzn11	Yzn11	Yzn11	Yzn11	Yzn11	Dyn11	Dyn11	Dyn11	Dyn11	Dyn11
Iron losses (W)	85	90	120	130	180	200	280	295	320	375	395
Iron losses (W) (2)	<63	<63	<63	63	68	81	93	110	130	153	189
Copper losses (W)	100	290	390	700	750	780	850	1080	1330	1700	2350
Copper losses (W) (2)	100	300	400	600	630	750	880	1020	1250	1440	1750
Short-circuit voltage (%)	2.3	3.5	3.5	4	3.5	3.5	3.5	3.5	4	4	4
Pressure drop (%) $\cos \varphi = 1$	2.1	2.92	2.3	2.84	2.4	1.65	1.5	1.45	1.6	1.7	1.75
Pressure drop (%) $\cos \varphi = 0.8$	2.4	3.5	3.4	3.96	3.4	3.1	3	2.8	3.7	3.6	3.5
Magnetizing current (%)	9	5.5	4	3	3.5	2.8	2.6	2.6	2.4	2.2	2.1


- (1) For road lighting, discharge lamps, complying with NF C 52-410
 (2) Compliance with EcoDesign regulation N°548/2014 - 2021

MODULO


MECHANICAL CHARACTERISTICS

WATERTIGHT TRANSFORMERS


Mechanical characteristics	TEE or TED-E MM 1 to 32 kVA TEE or TED-E MT 1 to 25 kVA										
	Nominal power rating (kVA)	1	2	3	5	6	8	10	16	25	32
	Length (mm)	260	260	310	310	390	Ø500	Ø500	660	930	930
	Width (mm)	260	260	276	276	290	Ø500	Ø500	540	655	655
	Height on terminals (mm)	280	280	280	280	330	500	500	690	850	850
	Total weight (kg)	40	45	58	66	95	125	130	250	375	380
	Weight of oil filling (kg)	-	-	-	-	-	19	18.5	35	80	100
	LV cable cross section (mm ²)	6	6	6	6	6	10	10	25	35	50



TEE MM or MT
1 - 6 kVA




TED-E MM or MT
8 - 10 kVA




TED-E MM or MT
16 - 32 kVA


Mechanical characteristics	TED-E TT 5 to 160 kVA											
	Nominal power rating (kVA)	5	10	16	25	32	50	63	80	100	125	160
	Length (mm)	660	660	930	930	930	1042	1090	1090	1090	1122	1122
	Width (mm)	540	540	655	655	655	545	595	595	595	627	627
	Height on terminals (mm)	690	690	850	850	850	1029	1129	1129	1129	1129	1229
	Total weight (kg)	260	260	400	410	420	550	730	750	780	830	900
	Weight of oil filling (kg)	40	45	160	160	140	250	150	280	160	210	210
	LV cable cross section (mm ²)	6	6	16	25	25	35	35	35	50	70	70



TED-E TT
5 - 10 kVA



TED-E TT
16 - 32 kVA

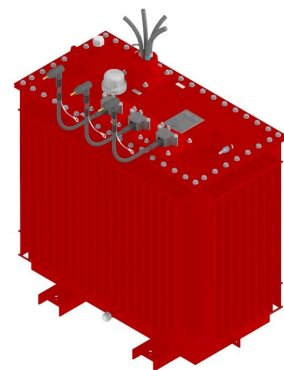

TED-E TT
50 - 160 kVA

IDR connection interface

The IDR connection interface include plug-ins that can be used to ensure the incoming network functions, network departure or bypass, for the supply of a TEE or TED-E transformer, and verification of voltage absence, earthing and short-circuiting. The same IDR interface will be able to perform network junction or bypass, depending on its equipment.

Connection

The various IDR have removable terminals that receive cable cross-sections of 6 to 35 mm². They are delivered along with the equipment needed to configure the cable heads.

Mechanical characteristics	IDR connection interface (with connectors)			
	IDR	IDR BI 1A/1D 1A/2 D	IDR BI 1A/3D	IDR TRI 1A/1D 1A/2 D
	Length (mm)	275	365	456
	Width (mm)	230	230	307
	Height (mm)	190	190	367
Total weight (kg)	11	14	11	


Characteristics

Araldite resin, corrosion resistant, Water-resistant, disconnectable, can be buried in specially designed pits
 Isolating voltage : 7.2 kV
 Operating voltage : 3200 V to 6600 V
 Max. intensity : 100 A
 Protection grade : IP68


Operating conditions

Environmental class AD7: can be completely or partially submerged in water, temporarily.


IDR BI CONNECTION INTERFACE for single-phase network



IDR BI 1A / 1D
(Interface junction
for single-phase network)




IDR BI 1A / 2D
(Bypass interface
for single-phase network)




IDR BI 1A / 3D
(Bypass interface
for single-phase network)


IDR TRI CONNECTION INTERFACE for three-phase network

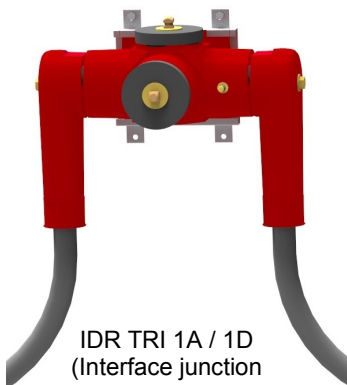

IDR TRI 1A / 1D
(Interface junction
for three-phase network)







IDR TRI 1A / 2D
(Bypass interface
for three-phase network)






IDD
(Supplemental bypass
Interface making possible an
IDR 1A / 3D)

Complementary accessories for single-phase network

Part number	Designation	Use	Product
30 08125	BBF female two-pole plug	Can be used to isolate up to two one-pole plugs, allowing for an isolated network	
30 08126	Earthing and short circuiting plug (EMCB)	Allows the earthing of two one-pole plugs	
30 08090	BBM male two-pole plug (for TNRS network)	Can insulate any of the four IDR inputs	
30 08115	BBM-C male two-pole plug (for TNRC network)		

Complementary accessories three-phase network

Part number	Designation	Use	Product
30 07826	BTF female three-pole plug	To insulate either a three-pole plug or up to three one-pole plugs	
30 07827	Earthing and short-circuiting plug (EMC)	Allows earthing of either one three-pole plug, or up to three one-pole plugs	
30 10158	Three-pole plug (BTM)	Can be used to insulate any of the four three-pole IDR inputs	

MODULO

Plug in *TERMINAL* kit

WATERTIGHT TRANSFORMERS

Overview

The connection terminals allow connection of numerous cables, with the plug on the cable. It can receive all cables types, 6 to 35 mm².

For 3200 V, 5500 V, 6600 V networks:

- Belted cable
- Radial field cable
- One-pole twisted cable
- Two-pole cable

For 950 V network:

- U 1000 R2V cable or other

Electrical characteristics

Max. intensity : 100 A
Insulation class : 7.2 kV

Mechanical characteristics

The cable on the sealing sleeve has a maximum outer diameter of 48 mm (Modulo TRI)



Connection

By screw terminal



Please specify in the order:

- Cable type and cross section
- For special cable types, please supply a sample

Modulo BI

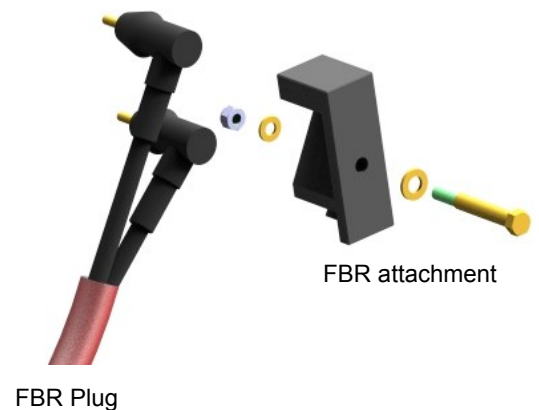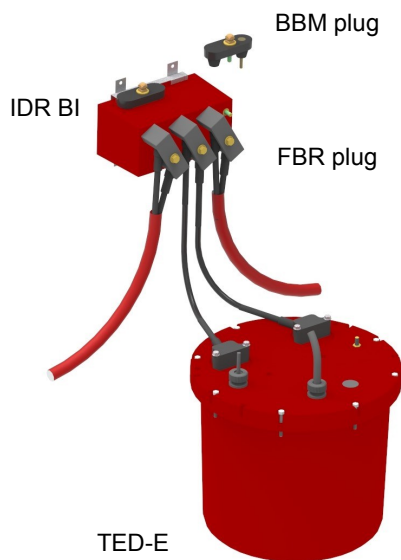

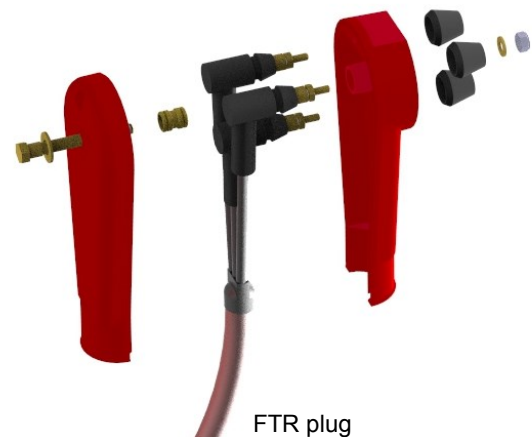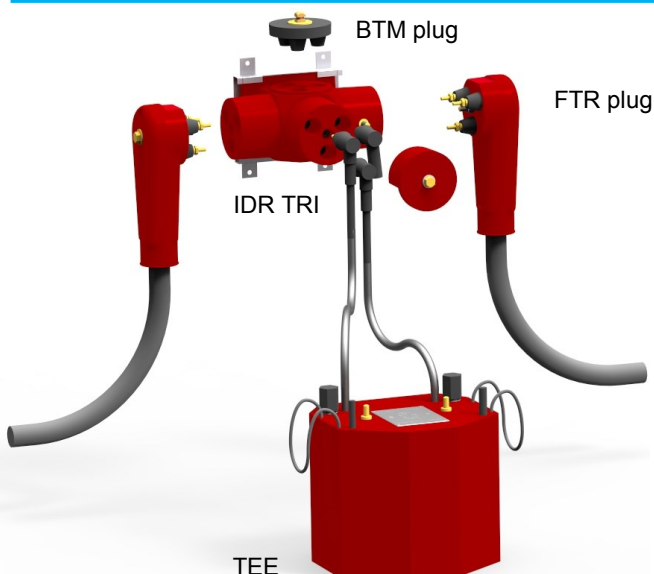


Modulo TRI




MODULO




SPARE PARTS ACCESSORIES

WATERTIGHT TRANSFORMERS


Part number	Designation	Product
30 08122	BI IDR FBR mounting plug	
30 08105	Socket for concentric two-pole cable, 6 to 25 mm ²	
30 08354	Socket for two one-pole cables 6 to 25 mm ²	



For IDR BI



Part number	Designation	Product
30 08244	Mounting plug for one-pole TRI IDR	
30 07861	Three-phase waterproof cap	
30 08788	Socket for three-pole belting cable 6 to 25 mm ²	
30 07867	Socket for 3 one-pole cables 6 to 25 mm ²	

For IDR TRI



Part number	Designation	Product
10 17491	Tube of silicon grease	
10 26033	Sealing cap	
30 09136	One-pole plug for TEE or TED-E	
10 18116	BBF, EMCB Mounting plate	
10 17316	Mounting plate for BI IDR, TRI IDR, BTF, EMC	

For both



CBT low voltage cabinet with breaker

CBT IP67 Low voltage protection cabinet

Watertight polyester low voltage cabinet, corrosion resistant, for installation on the wall near the network transformer.

Made of a base and a cover closed by plastic screw. Grey cover.

Equipment options, depending on needs:

Breaker cabinet:

One or several one-pole and neutral breakers, two-pole or three-pole B curve, appropriate for the power rating transformer and dimension for supplying outdoor lighting lamps.

An MX trigger coil associated with a transformer thermal probe

Fuse cabinet:

A fuse with a neutral strip or multiple fuses

For all cabinet:

Direct connection on the circuit breaker terminal for U1000 R2V cable type or equivalent, maximum cable cross-section 25 mm²

One cable gland for the cable arriving at the transformer

One cable gland for thermal probe

One cable gland for output cable

IP67 CBT cabinet for single-phase transformers

For transformer	1 kVA	2 kVA	3 kVA	5 kVA	6 kVA	8 kVA	10 kVA	16 kVA	25 kVA	32 kVA
One-pole circuit breaker + neutral B curve	10 A	16 A	20 A	32 A	40 A	-	-	-	-	-
Two-pole circuit breaker B curve	10 A	16 A	20 A	32 A	40 A	50 A	63 A	100 A	-	-
Fuse rating GL curve	6 A	10 A	16 A	25 A	32 A	40 A	50 A	63 A	-	-
Dimensions for 1 breaker or one fuse	140 x 230 x 95 mm									
Dimensions for 2 breakers	180 x 180 x 100 mm									
Output cable gland	Diameter included between 11 and 17 mm (for a U1000 R2V cable, 2 x 6 or 2 x 10 mm ²) Other cable gland upon request									

IP67 CBT cabinet for three-phase transformers

For transformer	5 kVA	10 kVA	16kVA	25 kVA	32 kVA	50 kVA	63kVA	80kVA	100 kVA	125 kVA
4-pole circuit breaker B curve	16 A	32 A	50 A	80 A	80 A	By consultation				
Dimensions for 1 breaker	280 x 190 x 130 mm									
Dimensions for 2 breakers	280 x 280 x 130 mm									
Dimensions for 3 breakers	560 x 280 x 130 mm									
Output cable gland	Diameter included between 22 and 32 mm (for a U1000 R2V cable, 5G25 or 5G35) Other cable gland upon request									

TER - MODULO

NETWORK INTERVENTION ACCESSORIES

WATERTIGHT TRANSFORMERS

The network intervention for each transformer must conform to the standards laid out in NF C17-200 and must use proper accessories.

The intervention procedure is laid out in our leaflet "Network intervention tools and methods."






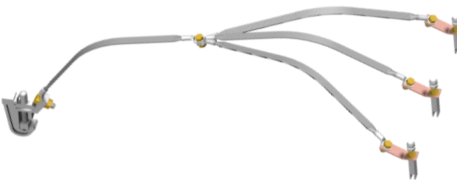
Common intervention tools



Part number	Designation
10 04588	Pole insulating
30 10047	Electronic voltage detector with sound signal for MV
10 19011	Electronic voltage detector with sound signal for 950 V network






Specific TER intervention tools


The voltage confirmation, earthing and short circuit operations are carried out on the one-pole connection interfaces.

Part number	Designation	Use	Product
30 10354	Operation key	Unscrew the cap to access the VAT compartment	
10 23765	Fuse extractor for 10 x 180 fuse	Remove the fuses	
30 10902	Fuse extractor for 20x127 fuse		
10 24130	Fuse extractor for 36 x 190 or 36 x 250 fuse		
30 11866	Earthing tools for single-phase network	Connect to the terminal jumper and earthing network (earthing cable 1x25 mm ²)	
30 11208	Earthing tools for three-phase network		


Specific MODULO intervention tools

The voltage confirmation, earthing and short circuit operations are carried out on the IDR connection interfaces.

Part number	Designation	Use	Product
30 07813	CMB operation key	Unscrew the cap to access the VAT compartment	
30 08056	PMCB earthing and short circuiting plate	For BI IDR	
30 07819	PMC earthing and short circuit plate	For TRI IDR	
10 04709	Earthing strap	Attach the earthing plate to the earthing clamp	
10 04711	Earthing clamp	Connect the earthing network (1 x 25 mm ²)	



IDR BI



IDR TRI

CLA LIGHTING ARRESTERS

WATERTIGHT ARRESTERS FOR TER AND MODULO

WATERTIGHT TRANSFORMERS



Use

The CLA lighting arresters are specially made for installation in the pits closer to the transformers. They conform to current CEI standards, and are effective against overvoltages due to various causes, including atmospheric influences, static charges and lightning.

Advantages

A high margin of operating safety between the start-up voltage and the insulation level, with no inadvertent operation.

Maintenance optimization; the CLA can easily be added to existing installations, thanks to its standard connection adapted to all transformers.

Construction

The CLA is made of oxide and zinc non-linear resistors (varistors), protected by an epoxy glass laminate. The assembly is molded in polyurethane. The ground connection is achieved via M12 dowel.

Technical characteristics

PERFORMANCES:

Protection grade : P68
 Operating temperature : 40 degrees C to +60 degrees C
 Earthing connection : M12

Connection:

TER:

Cable 1.5 m long equipped with a thimble to connect to the TER terminal

Modulo:

Cable 1.5 m long equipped with a one-pole plug, to connect to the IDR




CLA connected on IDR BI or IDR TRI

Model	CLA-10	CLA-20	CLA-30
Network voltage	950 V	3200 V	5500 V
Permanent voltage service	2.55 kV	5.10 kV	7.65 kV
Nominal voltage (current 1 mA)	3 kV	6 kV	9 kV
Acceptable overvoltage (1s)	3.4 kV	6.8 kV	10.2 kV
Surcharge nominal current	10 kA	10 kA	10 kA
Residual voltage (10 kA surge 1 us)	9 kV	19 kV	29 kV
Max. overcurrent (4/10 us)	65 kA	65 kA	65 kA
Length (mm)	115		
Width (mm)	85		
Height (mm)	240		
Weight (kg)	5		

TER - MODULO CONCRETE PITS

WATERTIGHT TRANSFORMERS

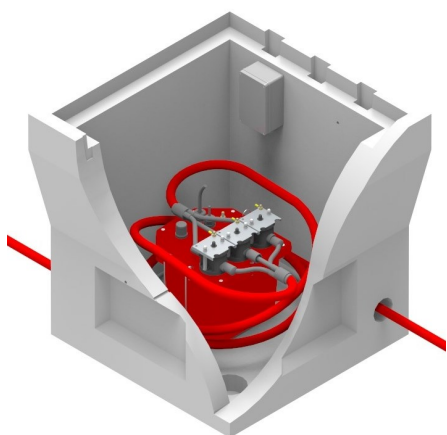

Monobloc concrete pits equipped for IP68 medium-voltage network transformers or junction boxes.



The pit is to be buried near the receivers. Bottom includes a water drainage system.

The pit is delivered in accordance with the standards set out in NF C17-200. It's equipped with:

- One or more 250 kN buffers
- An articulated safety grill
- A grill support frame ready to seal
- Interlocking device (by nut) and poster set conforming to the standards laid out in NF C17-200

The sleeves penetrating the pit must be closed to prevent water from entering.

Part number	Designation	Overall dimensions			Operating dimensions			Weight
		L	I	H	L	I	H	
30 12740	800x800 Pit	1050	1050	990	800	800	840	820 kg
30 12741	1000x800 Pit	1250	1050	990	1000	800	840	950 kg
30 12742	1200x800 Pit	1450	1050	990	1200	800	840	1100 kg
	1790x880 Pit	2035	1125	1300	1790	880	1200	2100 kg

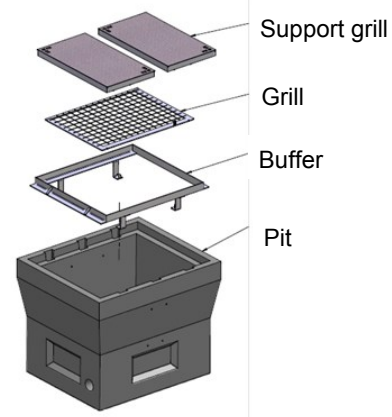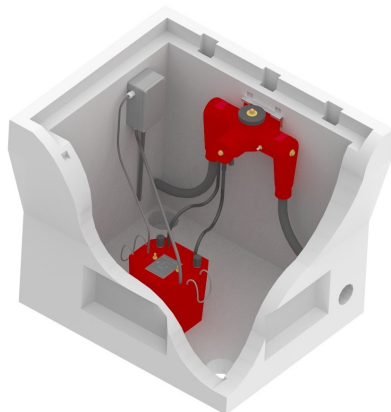


Transformer	Power rating	Pit operating dimension (mm)		
		L	I	H
TER M	1 à 5 kVA	800	800	840
Modulo M	1 à 6 kVA			
TER M	6 to 10 kVA	1000	800	840
Modulo M	8 to 10 kVA			
TER M or T	16 to 32 kVA	1790	880	1200
Modulo M or T				
TER or Modulo M	16 kVA	1300	800	1100
TER or Modulo T	5 & 10 kVA			
TER or Modulo M	25 & 32 kVA	1700	1000	1300
TER or Modulo T	16 to 50 kVA			
TER or Modulo T	63 to 100 kVA	1900	1000	1500
TER or Modulo T	125 & 160 kVA	1900	1000	1700



Principle

A special key, which is recoverable at the transformer station after closing the earthing switch, allows access to the network transformers.

This interlocking system between the earthing section and the transformers allows safe operation. For the installation, a special key for each feeder will be associated with the locks bearing the same numbers, allowing access to all the transformer feeders. Numbers 10 to 52 are provided.

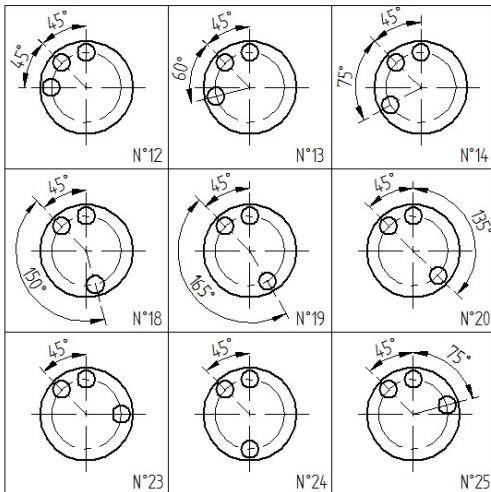


Examples of interlocking nut

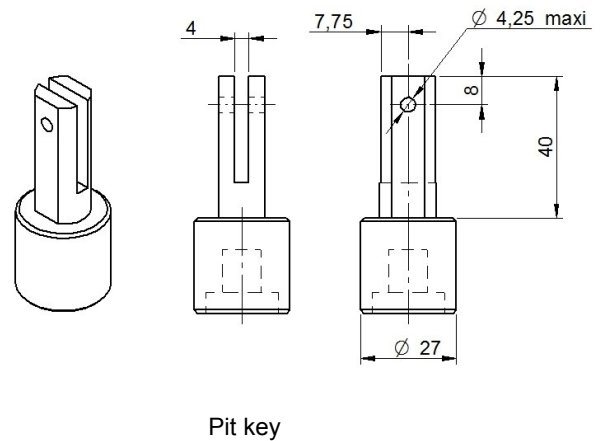

Pit interlocking


The special key activates nut no. 8, which releases the grid located in the interior of the pit (accessible through the access trap and the transformer).

Only the specific parts marked 6, 8 and 9 are listed in Augier's price lists.

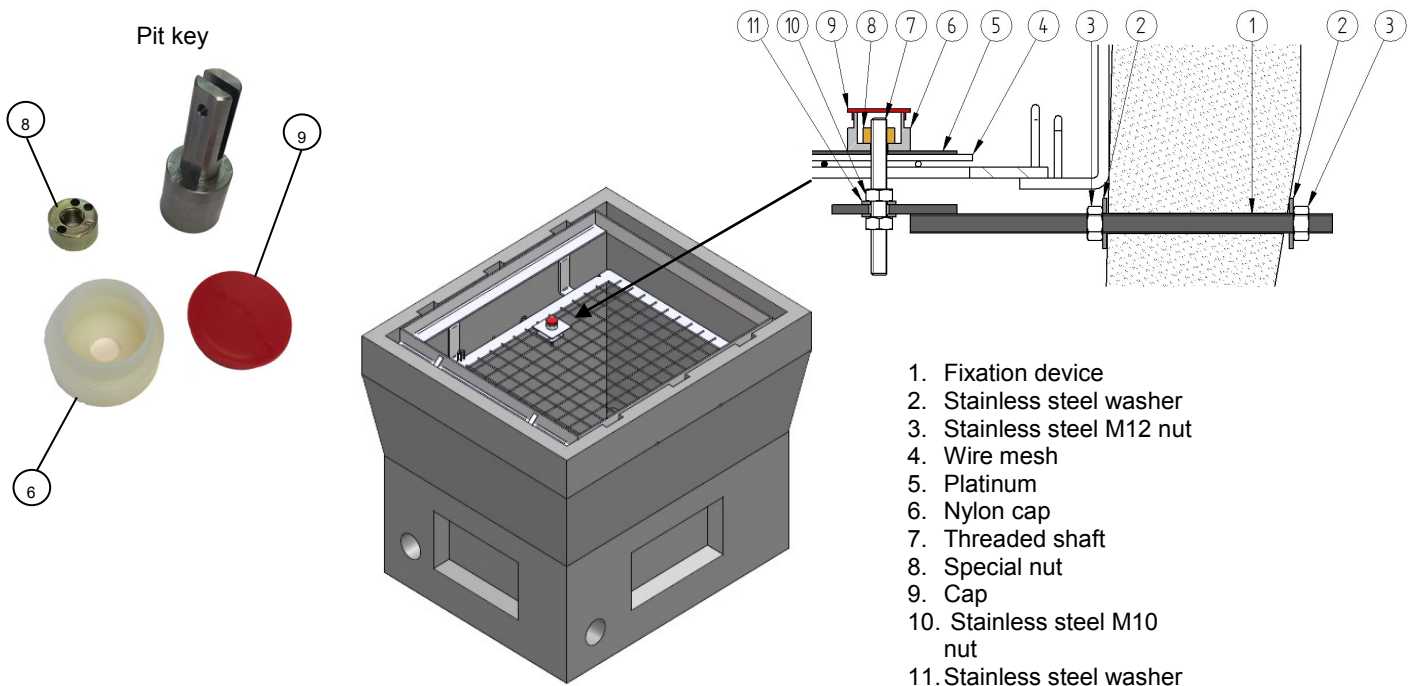


Interlocking transformer terminals in TER transformers


Mechanical interlocking device available for areas directly accessible under voltage (terminals, fuse switches) on the TER transformer. This type of interlocking is used where the pit interlocking is not retained. The principle is the same as for the pit interlocking, with a secure nut.

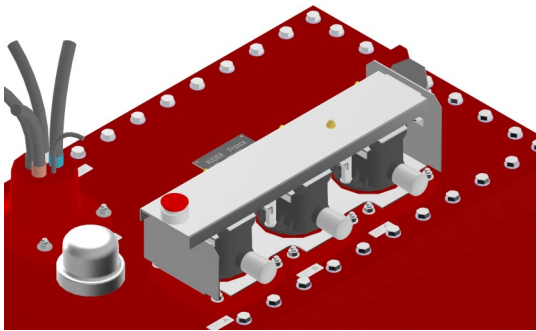

TER TT 50 kVA interlocking

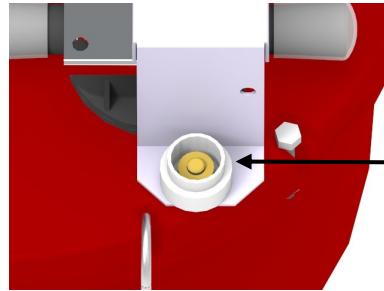


Detail of interlocking mechanism with special nut

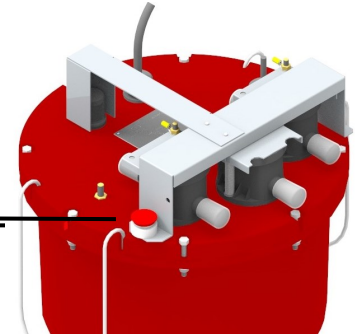


Interlocking TER MT 10 kVA

MODULO interlocking - Transformer and connection interface


Mechanical interlocking device available for fuse terminals directly on the transformer and a terminal interlocking device on the IDR connection terminal. The principle is the same as for the pit interlocking, with a security nut.

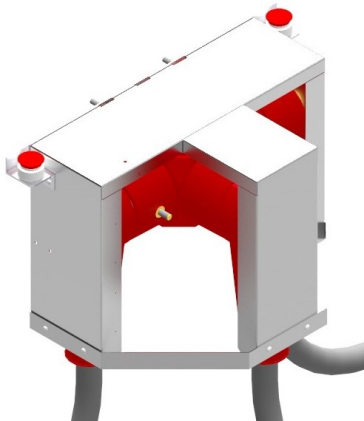

TRI IDR interlocking by nut

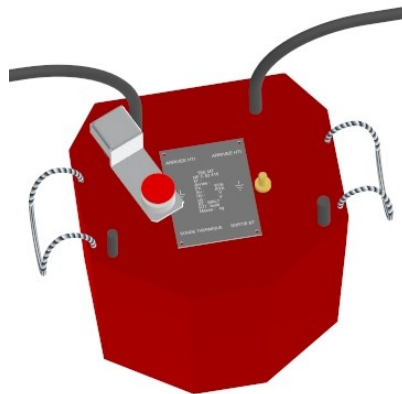


TEE interlocking by nut

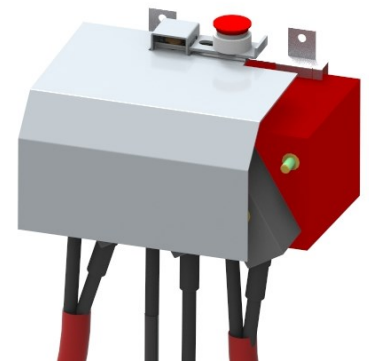

Detail TEE

These tools are recommended for the MV or MLV cable heads in the TER and MODULO transformers.

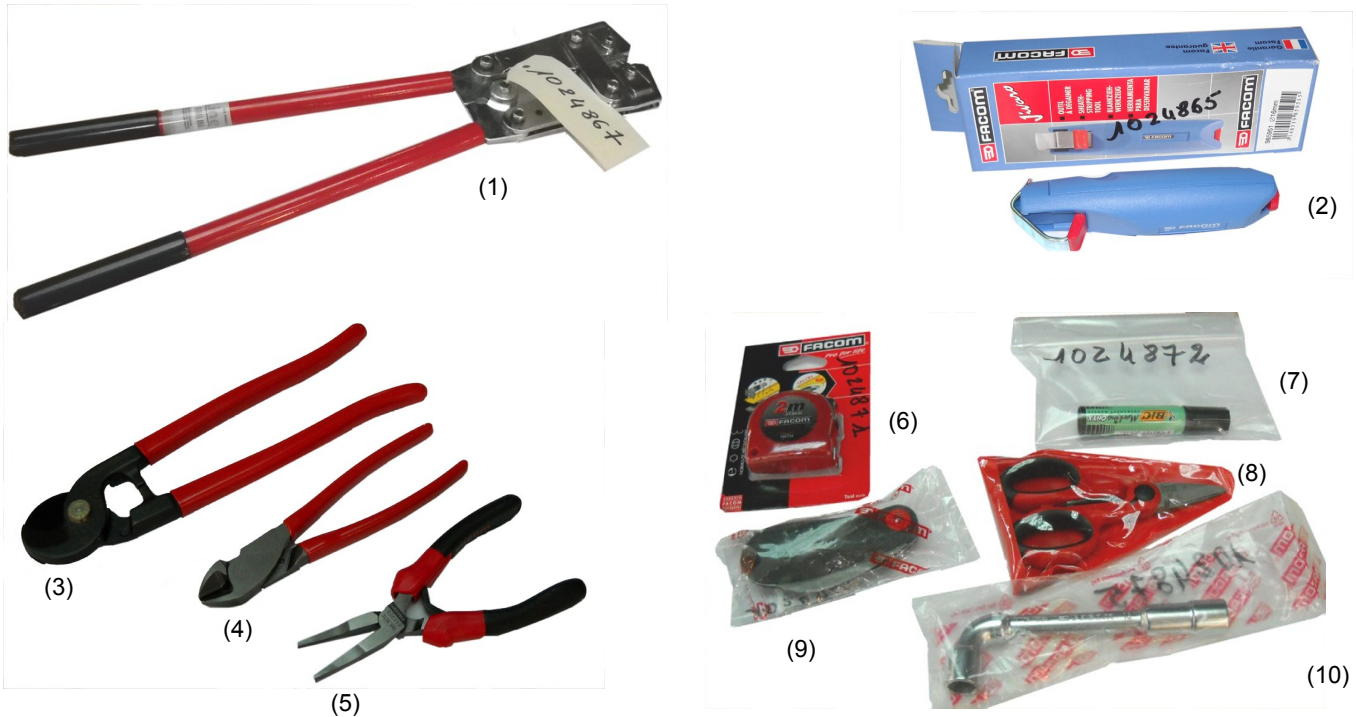

Part number	Indication	Product name
1024867	(1)	Clamping tool for cable cross-section 6 to 50 mm ²
1024865	(2)	Stripping tool
1024864	(3)	Cable cutter
1024868	(4)	Cutting pliers
1024869	(5)	Flat nosed pliers
1024871	(6)	Tape measure
1024872	(7)	Indelible marker
1024870	(8)	Scissors
1024866	(9)	Electrician's knife
1024875	(10)	Pipe wrench no. 13
	(10)	Pipe wrench no. 16 (BI and TRI IDR)
1026593	(11)	Tool for peeling the semiconductor
1028713	(12)	Tool for stripping a one-pole cable
1028714	(13)	Hot air gun

* To be used in the case of bonded semiconductor

Photos not contractual

Voltamax

240 VA 950 V / 230 V

WATERTIGHT TRANSFORMERS

The VOLTAMAX is an IP68 water-resistant transformer intended for use on 950 V networks.

VOLTAMAX transformers are used to supply outdoor lighting and all other receivers.

These transformers can be supplied alone for easy integration directly into the lighting source, or in a pit. They can also be supplied cables in an IP55 cabinet.

The VOLTAMAX is designed for single- or three-phase networks:

- Voltamax single-phase for single-phase network (M)
- Voltamax single-phase for three-phase network (T)

The VOLTAMAX allows

- Fewer cable cross-sections due to use of a 950 V network
- Absence of LV 230 V sub-networks
- Easy integration on 950 V networks
- Simple installation

The use of epoxy resin guarantees the transformers will be:

- **Non corrosive, with no change over time**
- **Water resistant and immersible**
- **Insulating**




Voltamax in cabinet



- Grey wall cabinet, IP 55
- Equipped with a Voltamax, 950 V terminals, LV 230 V breaker
- Dimensions: Height 400 x length 300 x depth 200 mm
- Approximate weight: 8 kg

950 V connection



950 V connection on terminals protected by a transparent lid, for use with a U1000 R2 V cable or equivalent of 6 to 25 mm².

Terminals allow switch-off of the 950 V network artery.

Equipped with 950 V connection terminals, which can be supplied with just a Voltamax in order to facilitate implementation.

Voltamax

TECHNICAL CHARACTERISTICS

WATERTIGHT TRANSFORMERS



Voltamax 150 M / T	
Nominal power rating (VA)	240
Fuse rating 950 V FU (A)	6,3
Frequency (Hz)	50
Primary voltage	950
Off load secondary voltage	237
On load secondary voltage	230
Isolation voltage	1100
Coupling	Single-phase
Iron losses	2 W
Copper losses	14 W
Transformer efficiency	94%
Operating temperature (degrees C)	-15 / + 40
Overheating class	H

VOLTAMAX 150 M


For 950 V single-phase networks, used for power supply receivers up to 240 VA.

VOLTAMAX 150 T

For 950 V three-phase networks, used for power supply receivers up to 240 VA.

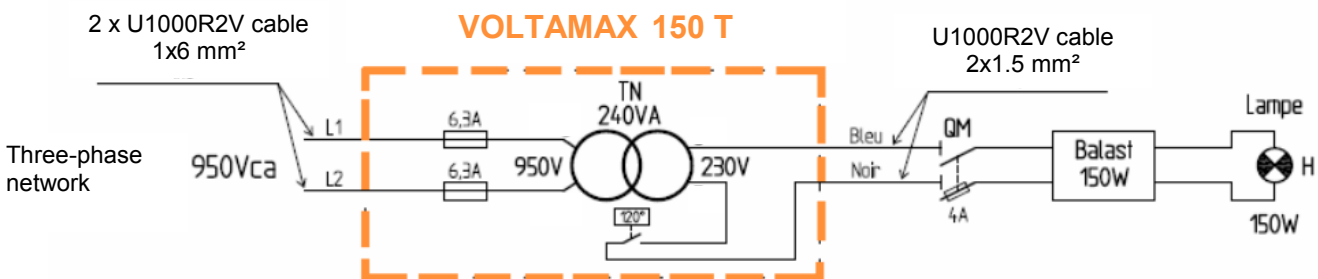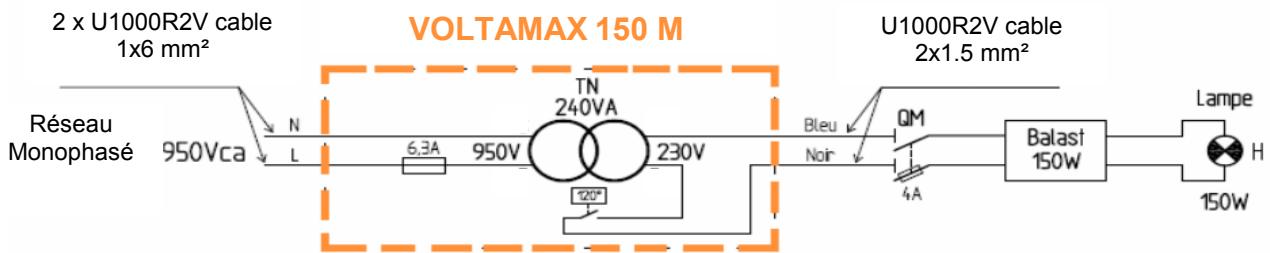


150 M / T	
Height (mm)	250
Length (mm)	141
Width (mm)	82
Mass (kg)	6
Attachment	4 M6x10 screw
Cable cross-section 950 V (mm ²)	2x1x6 - 1 meter long
Cable cross-section 230 V (mm ²)	2x1,5 - 1 meter long
IP protection grade	68
IK protection grade	10

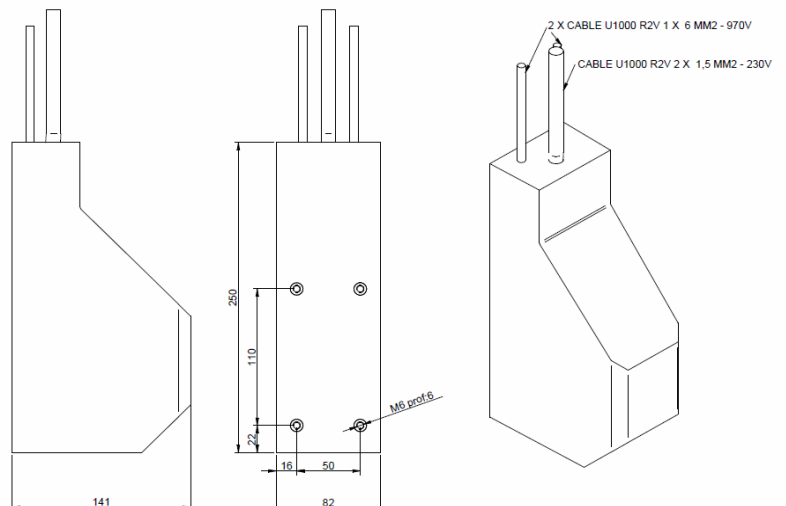

950 V Network

U 1000 R2V 1000 V cable

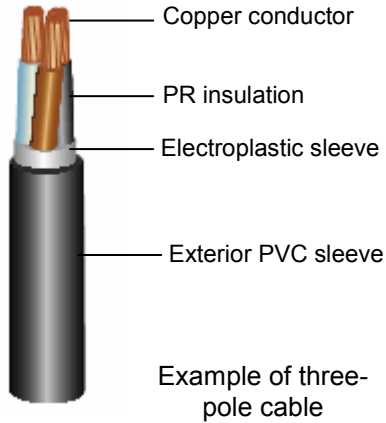

Cable cross-section (mm ²)	Max. diameter of isolating sleeve (mm)	Approx. diameter at outer sleeve (mm)	Admissible intensity (A)
			Buried
3 x 6	4.3	15	66
3 x 10	5.1	17	87
3 x 16	6.1	19.5	113
3 x 25	7.8	23.5	144
3 x 35	8.8	26	174
3 x 50	10.2	29	206


Curved ribbon: 6 x diameter

These cables should conform to the following standards:

Regulation : NF C32-321
 Class : 1 kV
 Conductor : class 2

3200 V Single-phase network

Two-pole concentric 3.6 / 6 kV — with or without shield

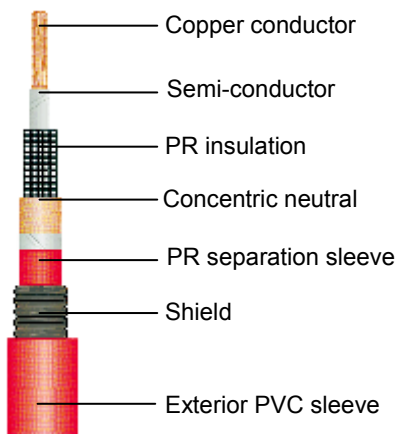

Cable cross-section (mm ²)	Max. diameter on isolating sleeve	Approx. diameter at outer sleeve (mm)		Admissible intensity (A) Buried
		Cable without shield	Cable with shield	
6 + 6	16	18.6	19.6	63
10 + 10	16.5	19.2	20.2	90
16 + 16	18.3	21	22	115
25 + 25	20.5	23.2	24.2	150


Curved ribbon: 10 x diameter

These cables should conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

5500 V / 6600 V Network

Three-pole belting cable, non-radial shielded cable 6/6 kV

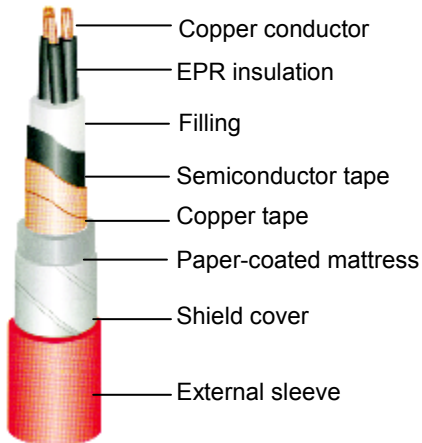

Cable cross-section (mm ²)	Max. outer diameter (mm)	Admissible intensity (A)	
		Buried	Open air
3 x 10	33	72	62
3 x 16	35	94	81
3 x 25	39.5	120	105
3 x 35	43	145	130


Curved ribbon: 9 x exterior diameter

These cables should conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

5500 V / 6600 V Network

Twisted three-pole cable 3.6/6 kV

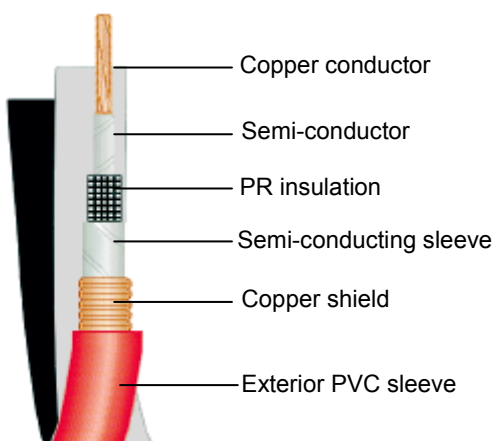

Cable cross-section (mm ²)	Max. exterior diameter (mm)		Admissible intensity (A)	
	Sleeve	Twist	Buried	Open air
3 x 1 x 10	18	36	97	92
3 x 1 x 16	19.6	39.5	125	120
3 x 1 x 25	21.2	42.5	160	155
3 x 1 x 35	22.4	45	190	190

Curved ribbon: 9 x exterior diameter

These cables conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

AUGIER HAS BEEN ISO 9001 CERTIFIED SINCE 1995



Dealer contact information:

60.12202 With constant improvements, the manufacturer may alter information without prior warning

AUGIER
energy

Zone Industrielle de Carros - 1ère avenue, 13ème rue, n°3890 - 06510 Carros - France
+33 4 92 08 62 00 | Contact@augier.com | www.augier.com