


TER
Transformers



MODULO
Transformers

IP68 WATERTIGHT TRANSFORMERS
950 V - 3200 V - 5500 V - 6600 V networks
Product leaflet

- Recommended for underground installations
- Immersible and non-corrodible substations
- Integrated electrical protections
- Robust and long lasting
- Dry or vegetable oil transformers depending on power rating

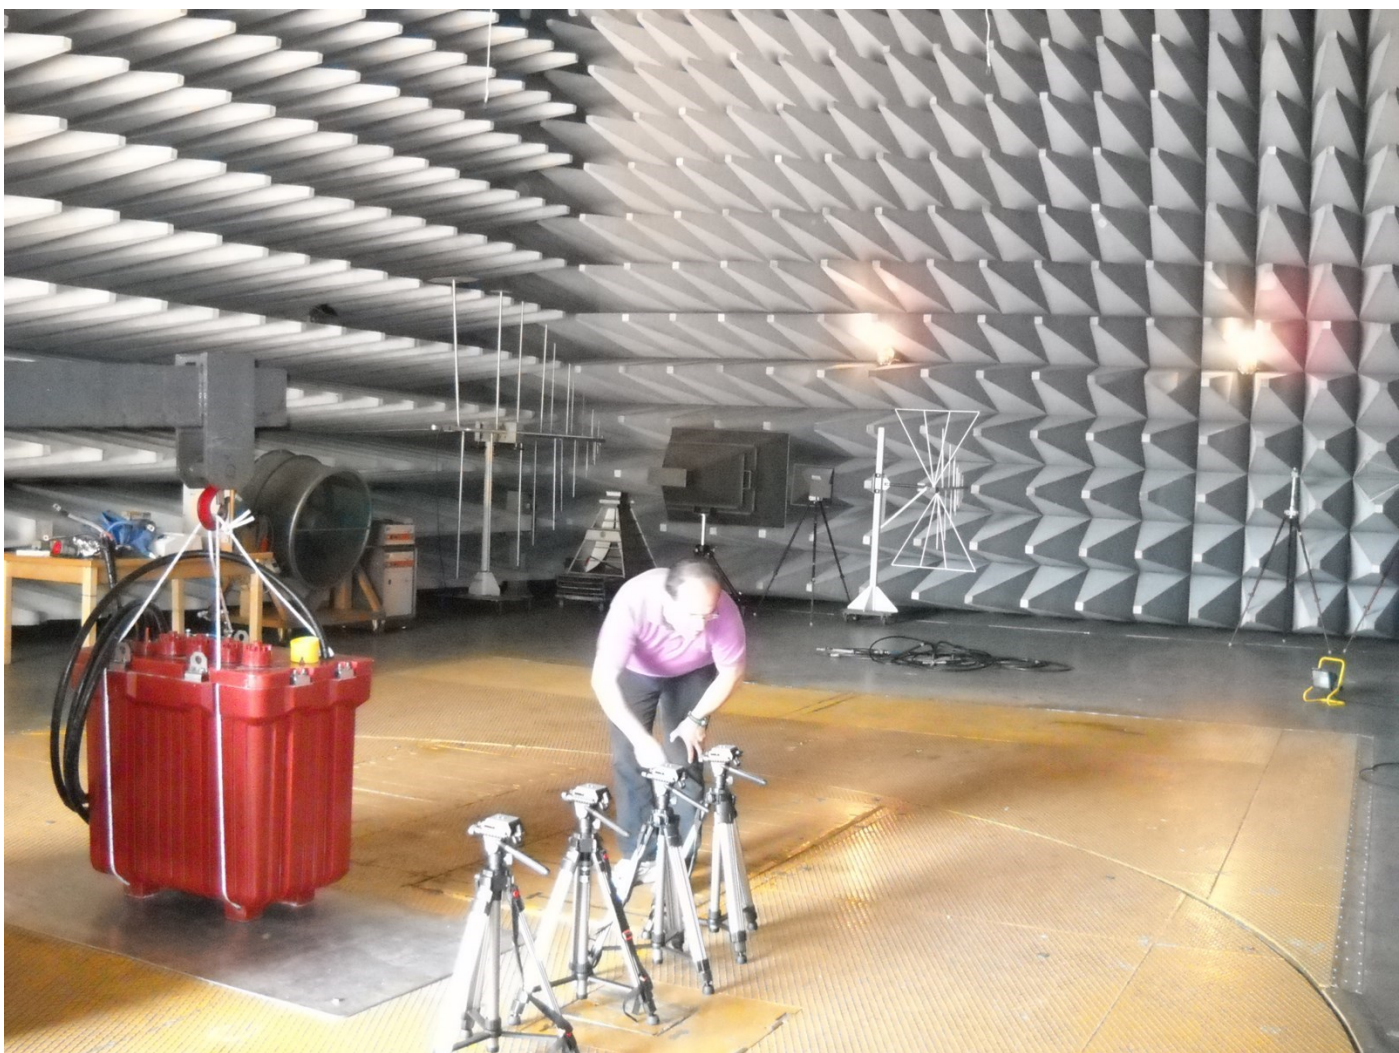

Watertight transformers, IP68, resistant to severe weather conditions, designed to function in hostile conditions, underground transformers in pit or in outdoor cabinet. Transformers are tested and conform to the standards NF C52-410.

| | |
|---|-------|
| OVERVIEW | 4 |
| APPLICATIONS | 5 |
| LIST OF SUBSTATION MODELS | 6 |
| SAMPLE PROJECTS | 7 |
| TER TRANSFORMERS | |
| <i>Transformers</i> | 8-11 |
| <i>Network accessories</i> | 12-13 |
| <i>Spare parts</i> | 14-15 |
| MODULO TRANSFORMERS | |
| <i>Transformers</i> | 16-19 |
| <i>Network accessories</i> | 20-22 |
| <i>Spare parts</i> | 23 |
| LOW-VOLTAGE CABINET IP67 | 24 |
| INTERVENTION ACCESSORIES FOR THE NETWORK | 25-26 |
| WATERTIGHT LIGHTING ARRESTERS | 27 |
| CONCRETE PITS FOR WATERTIGHT TRANSFORMERS | 28 |
| INTERLOCKING - OUTDOOR CABINET FOR WATERTIGHT TRANSFORMERS | 29-30 |
| CONNECTING TOOLS | 31 |
| VOLTAMAX | 32-33 |
| RECOMMENDED CABLES | 34-35 |

Abbreviations

| | |
|-----|---------------------------------|
| LV | Low voltage |
| MLV | Maximum low voltage – 950 V |
| MV | Medium voltage — 3200 to 6600 V |
| HRC | High breaking power |

TRANSFORMERS INSTALLED IN A PIT

- Watertight and submergible transformers
- Non-corrodible transformer, unchanging over time
- Connectors adapted for all types of cables
- Easy installation



IP 68

ECO RESPONSIBLE TRANSFORMERS

- Low-loss transformers, complying with EU recommendations 548/2014 2021, aimed at reducing CO2 emissions
- AUGIER oil transformers are removable, repairable with a long lifespan
- Vegetable oil cooled transformers, 98% biodegradable oil in 21 days



NETWORK AND TRANSFORMERS PROTECTION

- MV or MLV protection by accessible fuses
- Transformer protection by thermal probe
- Low voltage protection by circuit breaker or fuse

LARGE RANGE OF TRANSFORMERS

- Power rating from 1 to 160 kVA
- Single or three-phase coupling
- Step-up or step-down transformers
- Voltage: 950 V, 3200 V, 5500 V, 6600 V

APPLICATIONS

WATERTIGHT TRANSFORMERS




Lighting

Lighting supply for roads, bypasses, industrial zones, tunnels, bridges



Roadway equipment

Supply to dynamic equipment (camera, variable messaging boards, radar, vehicle counting)

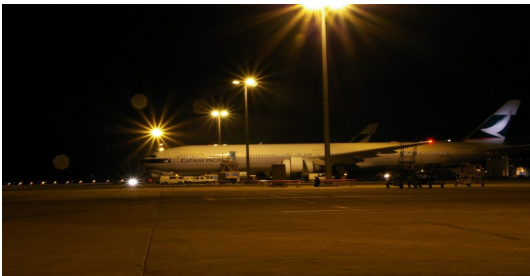

Airports

Supply to Navaid's equipment (Glide, VOR, DME, Localizer) and lighting for airplane parking, access roads, fencing



Military

Supply for surveillance devices, identified targets, gates



Power plants

Supply for security lighting, remote buildings, motorized doors, pumps, measuring equipment



Railways

Supply for GSM-R communications materials, instrumentation, and lighting of emergency outlets in tunnels



Recreational sites

Power for parking and access lighting



Oil & Gas

Supply for instrumentation and cathodic protection

AUGIER's watertight transformers are made of resin epoxy for power ratings up to 32 kVA. Resin epoxy guarantees non-corrosive transformers that do not change over time. They are watertight and submersible, insulating, and can be buried in a pit.

Main characteristics:

- Protection grade : IP 68 – IK 10
- Operating temperatures : - 15°C to + 40° C (+55°C on demand)
- Industrial frequencies : 5.5 kV : 20 kV – 50 Hz – 1 minute
: 3.2 kV : 10 kV – 50 Hz – 1 minute
: 950 V : 3 kV – 50 Hz – 1 minute
- Maximum altitude : 1000 meters

| TRANSFORMERS | | TER | MODULO |
|--------------------|--------------------------------|---------------------------------|---------------------------------|
| Operating voltage | 950 V | x | x |
| | 3200 V | x | x |
| | 5500 V | x | x |
| | 6600 V | x | x |
| Power rating | Single phase | 1 à 32 kVA | 1 à 32 kVA |
| | Three phase | 10 à 160 kVA | 10 à 160 kVA |
| Dielectric | Oil | x | 6 à 160 kVA |
| | Dry | | 1 à 5 kVA |
| MV connection | On the transformer | x | |
| | Separate from the transformer | | x |
| LV connection | On flexible cable HO7RNF | Length 4 meters | Length 4 meters |
| Tap changer | + - 5% | Included | Included from 6 kVA |
| MV Protection | By HRC fuse | x | x |
| Thermal protection | By threshold probe | Included | Included |
| LV protection | By fuse | Optional, in a separate cabinet | Optional, in a separate cabinet |
| | By circuit breaker and MX coil | Optional, in a separate cabinet | Optional, in a separate cabinet |
| Interlocking | By special nut | Optional | Optional |

Compliance with the following standards:


- Our transformers comply with the following standards and regulations:
- NC C52-410 : Transformers for outdoor electrical installation
 - IEC 76 : Power rating transformers
 - NF C20-010 – IEC 60 529 : Degree of protection for enclosures (IP)
 - NF C17-200 : Rules for road lighting systems
 - UE No. 548/2014 : European Directive ECODESIGN 2021

Operating conditions:

Environmental class AD7: can be completely or partially submerged in water, temporarily.

SELECTED PROJECTS

WATERTIGHT TRANSFORMERS

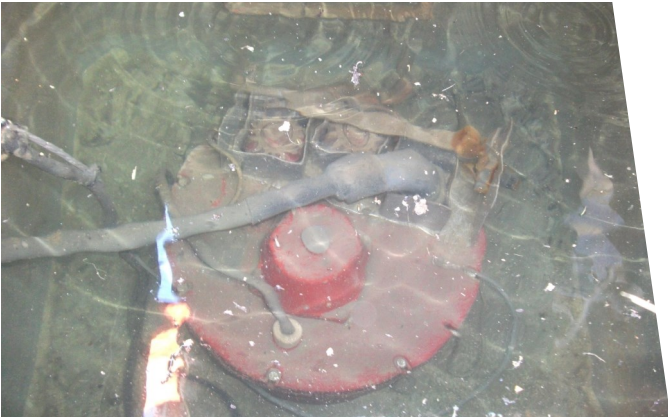

Railway, France, tunnel lighting supply



Tunnel, Spain, lighting and outlet supply



Airport, Middle East, Nav aids supply



Large sites, France, car park lighting



Airport, Middle East, lighting supply



Highway, Middle East, lighting



Military, France, shooting range supply (targets)




Roads, China, lighting supply

TER

From 1 to 160 kVA - 950 V, 3200 V, 5500 V,
6600 V

WATERTIGHT TRANSFORMERS

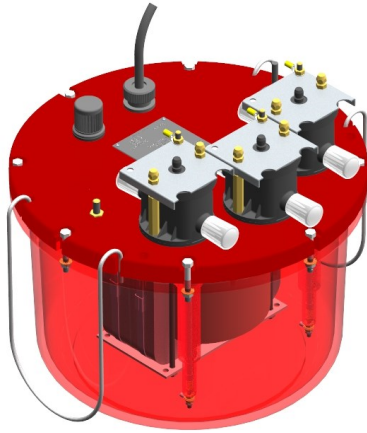

TER MT

TER network connection

- A system of one-pole disconnectable terminals incorporated in the transformer guarantees complete operational flexibility
- Easy to connect and disconnect
- For recommended cable type, AUGIER supplies the necessary equipment to connect to the one-pole terminals
- The "T" transformers allow section isolation by disconnecting the shunt located on the terminal
- For TER MT, the two external terminals are active and the middle terminal ensures continuity of the network

TER low voltage connection

- The low voltage output is with H 07 RNF cable length 4 meters


TER transformers and network protections

- The HRC fuses are easily accessible and directly incorporated in the transformer connection terminal

Advantages of TER transformers

- Watertight transformers, IP68, can be buried in an accessible pit
- Finished in epoxy resin up to 32 kVA
- Thermal protection by probe, output on cable H07 RNF 2x1.5 mm², length 4 meters. Thermal probe with closing, 110°C – 2A – 250 V
- Voltage adjusting tap changers of +/- 5% available on full TER line
- Full line of equipment for no-voltage check, conforms to NF C17-200 standards and available on demand

Optional features

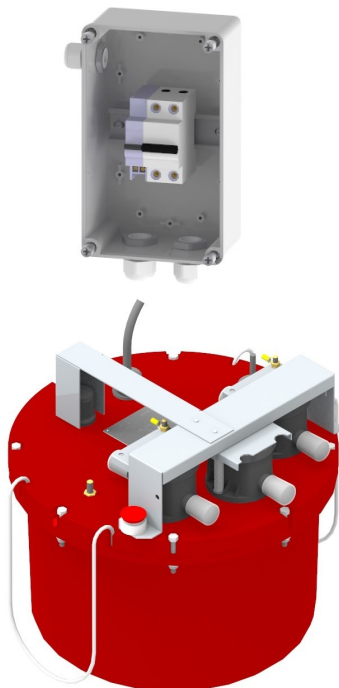

- Low voltage protection:
 - IP67 cabinet equipped with a circuit breaker, providing protection against short circuits for low voltage network. Circuit breaker offers the thermal protection of the transformer, guaranteeing absence of defects. Cabinet is separate from transformer (see page 24 for details).
 - IP67 cabinet also equipped with low voltage fuses
- Terminal interlocking by nut (see detail pages 29-30)
- 6 meters or 10 meters low voltage connection cable

Choice table - TER for single or three-phase network

| Network \ Transformer | TER MM | TER MT | TER TT |
|-----------------------|------------------|------------------|--------------------|
| Single phase | From 1 to 32 kVA | | |
| Three phase | | From 1 to 25 kVA | From 10 to 160 kVA |

TER MM : Single-phase transformer for single-phase network
TER MT : Single-phase transformer for three-phase network
TER TT : Three-phase transformer for three-phase network

Technical characteristics:

Transformers made of Araldite resin up to 32 kVA, and metallic cuve from 50 to 160 kVA
 Corrosion resistant, water-resistant, disconnectable, can be buried in accessible pits or installed in outdoor cabinet
 Protective grade : IP 68
 Primary voltage : 950 V, 3200 V, 5500 V, 6600 V
 Primary insulation voltage : 1.1 kV, 3.6 kV, 7.2 kV
 Secondary no load voltage : 237 V single phase, 410 V three phase + neutral
 Secondary insulation voltage : 1.1 kV
 Coupling : Single-phase li0 or three-phase Yzn11, Dyn 11, from 63 kVA
 Dielectric : Vegetable oil
 Comply with the following standards NF C52-410, IEC 76, Eco design TIER 2

Connection:

- T connection on the transformer
- One-pole disconnectable terminals, for section cables from 6 to 50 mm²
- Low voltage output on a two-pole cable H 07RN F for the TER MM and MT 1 to 25 kVA on two H 07 RN F one-pole cables for TER 32 kVA, on a five-pole for the TER TT. Cable available from 4 meters, choices available in table on page 11.

Protection :


MV : By 1 fuse in for TER MM, 2 fuses for TER MT, or three fuses for TER TT
LV : Delivered without protection, low voltage protection is installed in a separate cabinet

Electric positions :

MV : Winding isolated from the earth
 Upon request for the TER MM: winding end corresponds to the cable periphery conductor (neutral), grounding
LV : A low voltage winding extremity joined to the earthing terminal (blue conductor).
 Upon request: Low voltage isolated or connected to the ground by the middle winding point; in either case low voltage protection must be bipolar

Equipment: delivered with the transformer

- High voltage connection accessories to be assembled
- An M10 ground terminal rod, internally connected to the magnetic circuit
- Lifting ropes or lifting rings
- Signal panel
- Instructions for assembling disconnectable plugs

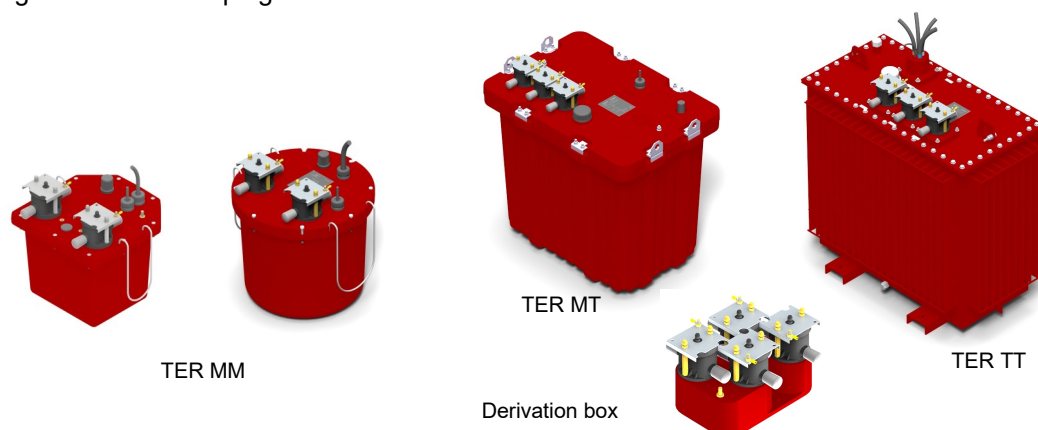

| TER MM 1 to 32 kVA and TER MT 1 to 25 kVA | | | | | | | | | | | |
|---|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
| Electrical characteristics | Nominal power rating (kVA) | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 16 | 25 | 32 |
| | Power rating (kVA) (1) | 0.8 | 1.6 | 2.4 | 4 | 4.8 | 6.4 | 8 | 12.8 | 20 | 25.6 |
| | Fuse rating 950 V (A) | 8 | 12 | 12 | 20 | 20 | 25 | 32 | 40 | 63 | 80 |
| | Fuse rating 3 à 3.3 kV (A) | 5 | 8 | 8 | 12 | 12 | 16 | 16 | 20 | 20 | 32 |
| | Fuse rating 5.5 à 6.6 kV (A) | 4 | 4 | 4 | 4 | 4 | 12 | 12 | 12 | 16 | |
| | Off load losses (W) | 20 | 30 | 40 | 50 | 55 | 110 | 110 | 110 | 130 | 155 |
| | On load losses (W) 75°C | 26 | 40 | 45 | 75 | 90 | 115 | 130 | 390 | 580 | 650 |
| | Short-circuit voltage (%) | 2.9 | 2.5 | 2.5 | 2.5 | 3 | 3 | 3 | 3 | 3 | 3 |
| | Voltage drop (%) $\cos \varphi = 0.8$ | 2.85 | 2.5 | 2.4 | 2.4 | 2.76 | 2.73 | 2.66 | 4.22 | 4.17 | 4.03 |
| | Short circuit current (kA) | 0.15 | 0.35 | 0.52 | 0.87 | 0.87 | 1.16 | 1.45 | 1.55 | 2.42 | 3.09 |


| TER TT 10 to 100 kVA 950 V - TER TT 10 to 160 kVA 3 kV to 6.6 kV | | | | | | | | | | | |
|--|---------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Electrical characteristics | Nominal power rating (kVA) | 10 | 16 | 25 | 32 | 50 | 63 | 80 | 100 | 125 | 160 |
| | Power rating (kVA) (1) | 8 | 12.8 | 20 | 25.6 | 40 | 50.4 | 64 | 80 | 100 | 128 |
| | Fuse rating 950 V (A) | 20 | 32 | 40 | 50 | 80 | 80 | 100 | 125 | | |
| | Fuse rating 3 à 3.3 kV (A) | 12 | 16 | 16 | 40 | 40 | 50 | 63 | 63 | 80 | 100 |
| | Fuse rating 5.5 à 6.6 kV (A) | 12 | 8 | 8 | 20 | 20 | 32 | 32 | 40 | 50 | 63 |
| | Coupling | Yzn11 | Yzn11 | Yzn11 | Yzn11 | Yzn11 | Dyn11 | Dyn11 | Dyn11 | Dyn11 | Dyn11 |
| | Off load losses (W) | 80 | 110 | 120 | 150 | 150 | 280 | 315 | 320 | 350 | 395 |
| | Off load losses (W) Eco (2) | 63 | 63 | 63 | 68 | 81 | 93 | 110 | 130 | 153 | 189 |
| | On losses 75°C (W) | 290 | 350 | 650 | 700 | 950 | 1100 | 1400 | 1800 | 1900 | 2450 |
| | On losses 75°C (W) Eco (2) | 290 | 350 | 600 | 630 | 750 | 880 | 1020 | 1250 | 1440 | 1750 |
| | Short-circuit voltage (%) | 3.5 | 3 | 4 | 3 | 4 | 4 | 4 | 4.5 | 4.5 | 4 |
| | Voltage drop (%) $\cos \varphi = 0.8$ | 3.48 | 2.99 | 3.84 | 2.93 | 3.42 | 3.37 | 3.29 | 3.59 | 3.53 | 3.18 |
| | Short circuit current (%) | 0.41 | 0.77 | 0.9 | 1.54 | 1.8 | 2.27 | 2.89 | 3.21 | 4.01 | 5.77 |

- (1) For road lighting, discharge lamps, complying with NF C 52-410
 (2) Compliance with EcoDesign regulation N°548/2014 TIER 2

TER MECHANICAL CHARACTERISTICS

WATERTIGHT TRANSFORMERS


| TER MM 1 to 32 kVA - TER MT 1 to 25 kVA | | | | | | | | | | | |
|---|---|-----|-----|-----|-----|------|------|------|-----|-----|-----|
| Mechanical characteristics | Nominal power rating (kVA) | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 16 | 25 | 32 |
| | Length (mm) | 400 | 400 | 400 | 400 | Ø500 | Ø500 | Ø500 | 660 | 930 | 930 |
| | Width (mm) | 420 | 420 | 420 | 420 | Ø500 | Ø500 | Ø500 | 540 | 655 | 655 |
| | Height on terminals (mm) | 440 | 440 | 440 | 440 | 552 | 552 | 552 | 750 | 950 | 950 |
| | Total weight (kg) | 65 | 65 | 70 | 75 | 100 | 125 | 130 | 250 | 375 | 380 |
| | Weight of oil filling (kg) | 19 | 19 | 15 | 15 | 20 | 32 | 32 | 72 | 140 | 100 |
| | LV cable cross section (mm ²) | 6 | 6 | 6 | 6 | 6 | 10 | 10 | 25 | 35 | 50 |



TER MM
1-5 kVA



TER MM
6-10 kVA




TER MM
16 kVA



TER MM
25-32 kVA




TER MT
1-5 kVA



TER MT
6-10 kVA




TER MT
16 kVA




TER MT
25 kVA


| TER TT 10 to 160 kVA | | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|------|------|------|------|------|------|
| Mechanical characteristics | Nominal power rating (kVA) | 10 | 16 | 25 | 32 | 50 | 63 | 80 | 100 | 125 | 160 |
| | Length (mm) | 660 | 930 | 930 | 930 | 1042 | 1090 | 1090 | 1090 | 1122 | 1122 |
| | Width (mm) | 540 | 655 | 655 | 655 | 545 | 595 | 595 | 595 | 627 | 627 |
| | Height on terminals (mm) | 750 | 950 | 950 | 950 | 1029 | 1129 | 1129 | 1129 | 1129 | 1229 |
| | Total weight (kg) | 260 | 400 | 410 | 420 | 550 | 730 | 750 | 780 | 830 | 900 |
| | Weight of oil filling (kg) | 66 | 140 | 160 | 160 | 250 | 150 | 180 | 180 | 210 | 280 |
| | LV cable cross section (mm ²) | 6 | 16 | 25 | 25 | 35 | 35 | 35 | 50 | 70 | 70 |



TER TT
10 kVA




TER TT
16-25-32 kVA




TER TT
50 to 160 kVA

Connection box


Our line includes different types of connection boxes: one offering one input- three outputs for single or three-phase networks, and the other offering one input - one output. The latter model can be used as an end cap or junction box, or to guarantee network continuity.




Box 1A
Box 1A/ 1D
(for single-phase network)



Box 1A / 1, 2 or 3D
(for single-phase network)



Box 1A - 1A / 1D
(for three-phase network)

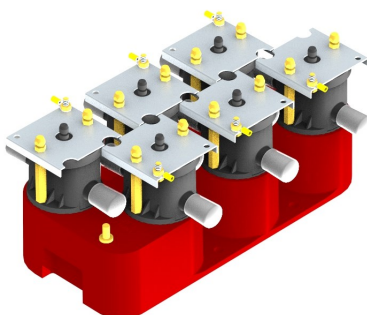

Box 1A / 2 or 3D
(for three-phase network)

Connection box

Cast in Araldite resin, corrosion resistant, watertight, disconnectable, and can be buried in accessible pits.

Insulation voltage : 7.2 kV
Operating voltage : 950 V to 6600 V
Maximum current : 80 A
Protection grade : IP68

Connection

The boxes comprise disconnectable terminals receiving a cable of 6 to 50 mm².

They are delivered with the necessary equipment for the cable heads.

Operating conditions

AD7 environmental operating class: the boxes can partially or totally submerged in water for limited periods of time.


Mechanical characteristics

| Type | Network | Length | Width | Height | Weight |
|-----------------------|--------------|--------|--------|--------|--------|
| 1A or 1A / 1, 2 or 3D | Single phase | 342 mm | 228 mm | 218 mm | 15 kg |
| 1A or 1A / 1D | Three phase | 342 mm | 228 mm | 218 mm | 15 kg |
| 1A / 2 or 3D | Three phase | 495 mm | 230 mm | 218 mm | 32 kg |

TER continuity plug

Waterproof plug - Ref 3012748

The plug isolates a TER terminal one-pole, allowing network continuity when the terminal TER is disconnected.

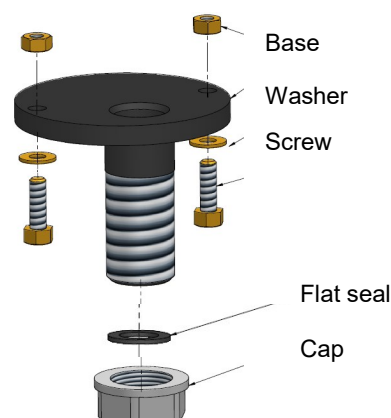

Overview

This terminal allows connection of numerous cables:
3200 V, 5500 V, 6600 V network:

- Belted cable
- Radial field cable
- One-pole twisted cable
- Two-pole cable

950 V network:

- U 1000 R2V cable or other

The terminal consists of two parts:

The socket, integrated with the TER

Plug to connect to the cable, designed to receive all types of cables from 6 to 50 mm²

Electrical characteristics

The terminal allows maximum transportation of 80 A.
The one-pole terminal was designed to maintain 7.2 kV and support all anticipated UTE tests

Mechanical characteristics


The sealing ring accommodates cables with a maximum sheath diameter of 19.5 mm

Connection

Par By copper crimp terminal

Please specify in the order:

- Cable type and cross section
- For special cable types, please supply a sample

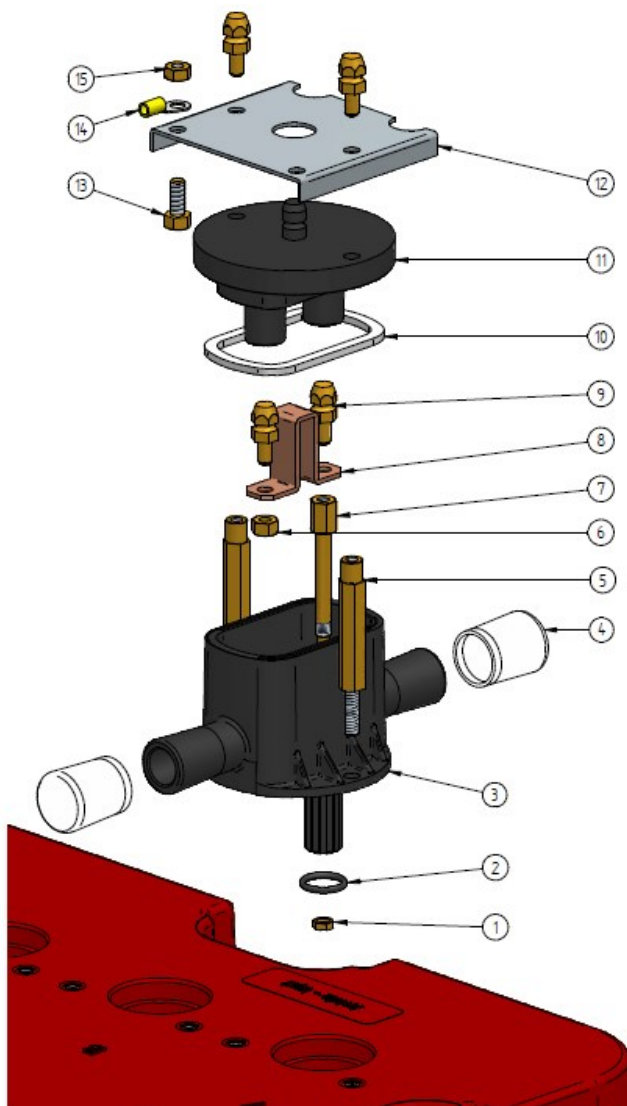

Protection against water leaks

The terminal offers three levels of protection:

- Between the enclosure (3) and the transformer cover by O-ring seal (2)
- Between the enclosure (3) and the cover (11) by soft seal (10)
- Between the cable and the enclosure (3) by thermo-retractable sleeve
- thermo-rétractable












1. B.3P Phase contact nut
2. D:18.64x3.53 O-ring
3. Disconnectable box
4. GPN Kapsto cap, watertight for storage
5. Spacer
6. HH M8 brass nut
7. Contact plug-in
8. Jumper
9. Screw gripper
10. Flat sealing junction box
11. Lid
12. Reinforced sheet lid
13. HU M8 brass screw*
14. Yellow 6 D8 round terminal*
15. HH M8 brass nut*




* Not supplied

| Sealing kit for one transformer | | | | | | |
|---------------------------------|-------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Part number | TER single phase | | TER three phase | | | |
| | Two pole cable 3.6/6 kV | 3013213 | | | | |
| | One pole cable 3.6/6 kV | 3013214 | 3013215 | | | |
| | Three pole cable 6/6 kV | | 3013212 | | | |
| | Airfield cable | 30 3217 | 3013218 | | | |
| | U1000 R2V cable | 3013216 | 3013219 | | | |
| Bag of 6 thimbles | | | | | | |
| Cross cable section | 6 mm ² | 10 mm ² | 16 mm ² | 25 mm ² | 35 mm ² | 50 mm ² |
| Thimbles part numbers | 3013430 | 3013431 | 3013432 | 3013433 | 3013434 | 3013435 |

We recommend replacing the seals after disassembling to guarantee water-resistant protection.




| Part number | Designation | Product |
|-------------|--|---|
| 3012968 | Kit cover |  |
| 3012712 | Kit housing |  |
| 3012969 | Kit seal |  |
| 3011239 | Jumper + screw kit |  |
| 3013054 | Brace + screw kit |  |
| 3011235 | Sealing cap TER MM |  |
| 3011865 | Sealing cap TER T |  |
| 1024354 | Seal for fuse terminal |  |
| 1023765 | Fuse removal tool for 10x180 fuse |  |
| 1024130 | Fuse removal tool for 36x190 and 36x250 fuse |  |
| 3010902 | Fuse removal tool for 20x127 fuse |  |

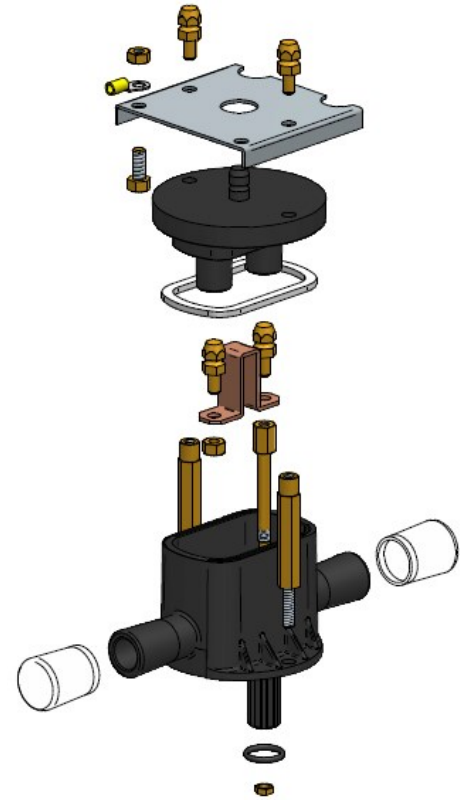

MODULO

FROM 1 To 160 kVA - 3200 V, 5500 V, 6600 V

WATERTIGHT TRANSFORMERS

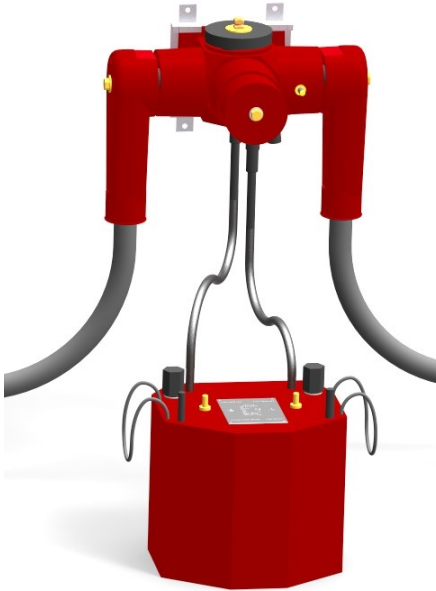

Modulo TRI

MODULO overview and connection network

- MODULO Consists of an IDR connection interface and a watertight transformer
- The IDR connection interface is separate from the transformer and guarantees highly flexible operation and network connection
- The IDR is connected to the transformer by flexible cables equipped with a one-pole plug manufactured in-house
- To connect the network cable to the IDR, AUGIER provides the necessary equipment adapted to high voltage
- The TEE transformers are dry type, while the TEDE are vegetable oil type

MODULO low voltage connection

- The low voltage output is standard with H 07 RNF cable, 4 meters length

MODULO transformers and network protection

- The high voltage fuses are installed in the back of the transformer and easily accessible
- The thermal probe protects the transformer from surcharges


Advantages of MODULO transformers

- Watertight transformers, IP68, can be buried in an accessible pit or installed in outdoor cabinet
- No-voltage verification is carried out in the IDR in a dedicated compartment
- From the 6 kVA single phase and for the full three-phase line, the transformers are equipped with tap changers +/- 5%

Optional functions



- Low voltage protection:
 - IP67 cabinet equipped with a circuit breaker, providing protection against short circuits. Circuit breaker offers the thermal protection of the transformer, guaranteeing elimination of defects. Cabinet is separate from transformer (see page 24 for details).
 - IP67 cabinet also equipped with low voltage fuses
- 6 meters or 10 meters low voltage connection cable
- Terminal interlocking by nut (see detail pages 29-30)
- Transformer fuse terminal interlocking by nut

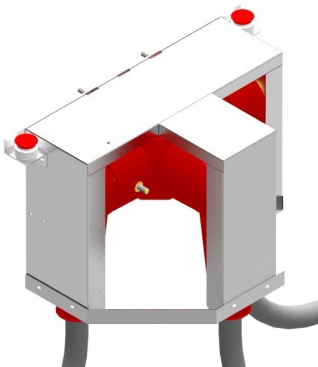

Choice table - MODULO for single or three-phase network

| Network \ Transformer | Modulo BI TEE or TEDE MM | Modulo TRI TEE or TEDE MT | Modulo TRI TEDE TT |
|-----------------------|-----------------------------|------------------------------|-----------------------|
| Single phase | From 1 to 32 kVA | | |
| Three phase | | From 1 to 25 kVA | From 10 to 160 kVA |

Modulo BI:

Single-phase transformer and interface for IDR connection for single-phase network

Modulo TRI :

Single-phase or three-phase transformer and IDR TRI interface connection for three-phase network

Technical characteristics:

Transformers made of Araldite resin up to 32 kVA, and metallic tank from 50 to 160 kVA
Corrosion resistant, water-resistant, disconnectable, can be buried in specially designed pit or installed in outdoor cabinet

| | |
|------------------------------|--|
| Protective grade | : IP 68 |
| Primary voltage | : 3200 V, 5500 V, 6600 V |
| Primary insulation voltage | : 3.6 kV, 7.2 kV |
| Secondary empty voltage | : 237 V single phase, 410 V three phase + neutral |
| Secondary insulation voltage | : 1.1 kV |
| Coupling | : Single-phase or three-phase Yzn11, Dyn11 from 63 kVA |
| Dielectric | : Dry or oil depending on voltage |

Comply with the following standards NF C52-410, IEC 76, Eco design TIER 2

Connection:

- Bypassing on the IDR connection interface
- Removable high voltage terminals for section cable from 6 to 35 mm²
- Low voltage output on a two-pole cable H 07RNF for the single-phase transformers 1 to 25 kVA; on two H 07RNF one-pole cables for the 32 kVA single-phase transformer, on a five-pole for the three-phase transformer. Cable available from 4 meters, choices available in table on page 19

Protection :

MV: By one fuse for TEE and TEDE, two fuses for TEE and TEDE MT, or three fuses for TEDE TT, fuse for high breaking capacity.

LV: Delivered without protection, low voltage protection is installed in a separate cabinet

Electric positions:

MV: Winding isolated from the earth


Upon request for the Modulo BI: neutral grounding on the IDR connection interface

LV: A low voltage winding extremity joined to the earthing terminal (blue conductor).

Upon request: Low voltage isolated or middle winding point connected to the ground, In either case low voltage protection must be bipolar

Equipment delivered with the transformer:

- Low-voltage connection accessories to be assembled
- Stainless steel support plate for mounting the IDR on the viewing panel
- An M10 ground terminal rod, internally connected to the magnetic circuit and on the IDR
- Lifting ropes or lifting rings
- Signal panel
- Instructions for assembling disconnectable plugs

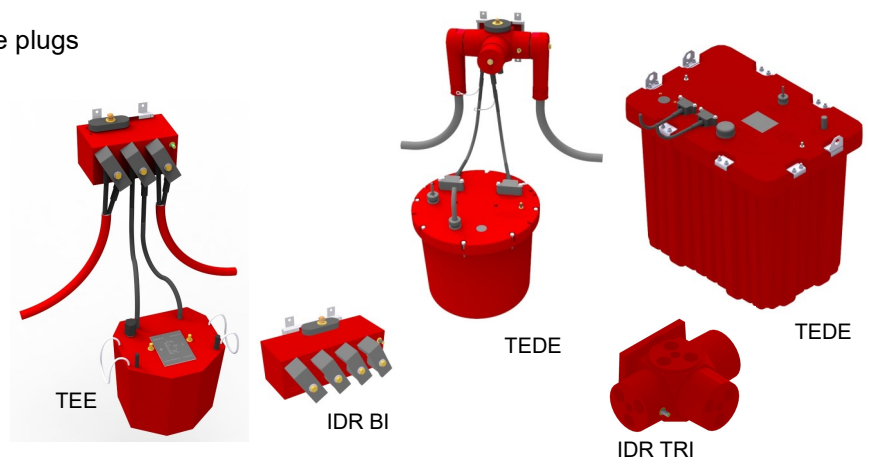


| MODULO BI: TEE or TEDE MM 1 to 32 kVA and MODULO TRI: TEE or TEDE MT 1 to 25 kVA | | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|------|------|
| Nominal power rating (kVA) | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 16 | 25 | 32 |
| Type of transformer | TEE | TEE | TEE | TEE | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE |
| Power rating (kVA) (1) | 0.8 | 1.6 | 2.4 | 4 | 4.8 | 6.4 | 8 | 12.8 | 20 | 25.6 |
| Fuse rating 950 V (A) | | | | | 20 | 25 | 32 | 40 | 63 | 80 |
| Fuse rating 3 to 3.3 kV (A) | 5 | 8 | 8 | 12 | 12 | 16 | 16 | 20 | 20 | 32 |
| Fuse rating 5.5 to 6.6 kV (A) | 4 | 4 | 4 | 4 | 4 | 12 | 12 | 12 | 16 | |
| Off load losses (W) | 25 | 45 | 58 | 65 | 55 | 110 | 110 | 110 | 130 | 155 |
| On load losses 75°C (W) | 26 | 40 | 45 | 75 | 90 | 115 | 130 | 390 | 580 | 650 |
| Short-circuit voltage (%) | 2.9 | 2.5 | 2.5 | 2.5 | 3 | 3 | 3 | 3 | 3 | 3 |
| Pressure drop (%) $\cos \varphi = 0.8$ | 2.85 | 2.5 | 2.4 | 2.4 | 2.76 | 2.73 | 2.66 | 4.22 | 4.17 | 4.03 |
| Short circuit current (kA) | 0.15 | 0.35 | 0.52 | 0.87 | 0.87 | 1.16 | 1.45 | 1.55 | 2.42 | 3.09 |


| MODULO TRI: TEDE TT 10 to 160 kVA | | | | | | | | | | |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Nominal power rating (kVA) | 10 | 16 | 25 | 32 | 50 | 63 | 80 | 100 | 125 | 160 |
| Type of transformer | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE | TEDE |
| Power rating (kVA) (1) | 8 | 12.8 | 20 | 25.6 | 40 | 50.4 | 64 | 80 | 100 | 128 |
| Fuse rating 950 V (A) | 20 | 32 | 40 | 50 | 80 | 80 | 100 | 125 | | |
| Fuse rating 3 to 3.3 kV (A) | 12 | 16 | 16 | 40 | 40 | 50 | 63 | 63 | 80 | 100 |
| Fuse rating 5.5 to 6.6 kV (A) | 12 | 8 | 8 | 20 | 20 | 32 | 32 | 40 | 50 | 63 |
| Coupling | Yzn11 | Yzn11 | Yzn11 | Yzn11 | Yzn11 | Dyn11 | Dyn11 | Dyn11 | Dyn11 | Dyn11 |
| Off load losses (W) | 80 | 110 | 120 | 150 | 150 | 280 | 315 | 320 | 350 | 395 |
| Off load losses (W) Eco (2) | 63 | 63 | 63 | 68 | 81 | 93 | 110 | 130 | 153 | 189 |
| On load losses 75°C (W) | 290 | 350 | 650 | 700 | 950 | 1100 | 1400 | 1800 | 1900 | 2450 |
| On load losses 75°C (W) Eco (2) | 290 | 350 | 600 | 630 | 750 | 880 | 1020 | 1250 | 1440 | 1750 |
| Short-circuit voltage (%) | 3.5 | 3 | 4 | 3 | 4 | 4 | 4 | 4.5 | 4.5 | 4 |
| Pressure drop (%) $\cos \varphi = 0.8$ | 3.48 | 2.99 | 3.84 | 2.93 | 3.42 | 3.37 | 3.29 | 3.59 | 3.53 | 3.18 |
| Short circuit current (kA) | 0.41 | 0.77 | 0.9 | 1.54 | 1.8 | 2.27 | 2.89 | 3.21 | 4.01 | 5.77 |

- (1) For road lighting, discharge lamps, complying with NF C 52-410
 (2) Compliance with EcoDesign regulation N°548/2014 TIER 2

| Mechanical characteristics | TEE or TEDE MM 1 to 32 kVA | | | | | TEE or TEDE MT 1 to 25 kVA | | | | | |
|----------------------------|---|-----|-----|-----|-----|----------------------------|------|------|-----|-----|-----|
| | Nominal power rating (kVA) | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 16 | 25 | 32 |
| | Length (mm) | 260 | 260 | 310 | 310 | Ø500 | Ø500 | Ø500 | 660 | 930 | 930 |
| | Width (mm) | 260 | 260 | 276 | 276 | Ø500 | Ø500 | Ø500 | 540 | 655 | 655 |
| | Height on terminals (mm) | 280 | 280 | 280 | 280 | 500 | 500 | 500 | 690 | 850 | 850 |
| | Total weight (kg) | 40 | 45 | 58 | 66 | 95 | 125 | 130 | 250 | 375 | 380 |
| | Weight of oil filling (kg) | | | | | | 32 | 32 | 72 | 140 | 100 |
| | LV cable cross section (mm ²) | 6 | 6 | 6 | 6 | 6 | 10 | 10 | 25 | 35 | 50 |



TEE MM or MT
1 to 5 kVA




TEDE MM or MT
6 to 10 kVA




TEDE MM or MT
16 to 32 kVA


| Mechanical characteristics | TEDE TT 10 to 160 kVA | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|------|------|------|------|------|------|
| | Nominal power rating (kVA) | 10 | 16 | 25 | 32 | 50 | 63 | 80 | 100 | 125 | 160 |
| | Length (mm) | 660 | 930 | 930 | 930 | 1042 | 1090 | 1090 | 1090 | 1122 | 1122 |
| | Width (mm) | 540 | 655 | 655 | 655 | 545 | 595 | 595 | 595 | 627 | 627 |
| | Height on terminals (mm) | 690 | 850 | 850 | 850 | 1029 | 1129 | 1129 | 1129 | 1129 | 1229 |
| | Total weight (kg) | 260 | 400 | 410 | 420 | 550 | 730 | 750 | 780 | 830 | 900 |
| | Weight of oil filling (kg) | 66 | 140 | 160 | 160 | 250 | 150 | 180 | 180 | 210 | 280 |
| | LV cable cross section (mm ²) | 6 | 16 | 25 | 25 | 35 | 35 | 35 | 50 | 70 | 70 |



TEDE TT
10 kVA



TEDE TT
16 - 32 kVA

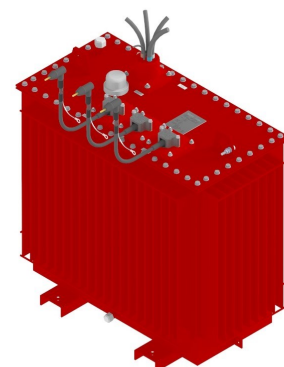

TEDE TT
50 - 160 kVA

IDR connection interface

The IDR connection interface include plug-in that can be used to ensure the incoming network functions, network departure or bypass, for the supply of a TEE or TEDE transformer, and verification of voltage absence, earthing and short-circuiting. The same IDR interface will be able to perform network junction or bypass, depending on its equipment.

Connection

The various IDR have removable terminals that receive cable cross-sections of 6 to 35 mm². They are delivered along with the equipment needed to configure the cable heads.

| Mechanical characteristics | IDR connection interface (with connectors) | | | |
|----------------------------|--|---------------------------|----------------|----------------------------|
| | IDR | IDR BI 1A / 1D 1A / 2D | IDR BI 1A / 3D | IDR TRI 1A / 1D 1A / 2D |
| | Length (mm) | 275 | 365 | 456 |
| | Width (mm) | 230 | 230 | 307 |
| | Height (mm) | 190 | 190 | 367 |
| Total weight (kg) | 11 | 14 | 11 | |


Characteristics

Araldite resin, corrosion resistant, Water-resistant, disconnectable, can be buried in specially designed pits
 Isolating voltage : 7.2 kV
 Operating voltage : 3200 V to 6600 V
 Max. intensity : 100 A
 Protection grade : IP68


Operating conditions

Environmental class AD7: can be completely or partially submerged in water, temporarily.

IDR BI CONNECTION INTERFACE for single-phase network



IDR BI 1A / 1D
(Interface junction
for single-phase network)




IDR BI 1A / 2D
(Bypass interface
for single-phase network)




IDR BI 1A / 3D
(Bypass interface
for single-phase network)


IDR TRI CONNECTION INTERFACE for three-phase network

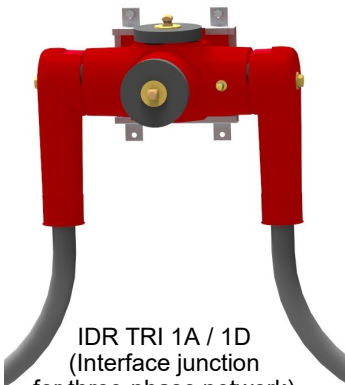

IDR TRI 1A / 1D
(Interface junction
for three-phase network)







IDR TRI 1A / 2D
(Bypass interface
for three-phase network)






IDD
(Supplemental bypass
Interface making possible an
IDR 1A / 3D)

Complementary accessories for single-phase network

| Part number | Designation | Use | Product |
|-------------|---|---|---|
| 3008125 | BBF female two-pole plug | Can be used to isolate up to two one-pole plugs, allowing for an isolated network |  |
| 3008126 | Earthing and short circuiting plug (EMCB) | Allows the earthing of two one-pole plugs |  |
| 3008090 | BBM male two-pole plug (for TNRS network) | Can insulate any of the four IDR inputs |  |
| 3008115 | BBM-C male two-pole plug (for TNRC network) | |  |

Complementary accessories three-phase network

| Part number | Designation | Use | Product |
|-------------|--|--|---|
| 3007826 | BTF female three-pole plug | To insulate either a three-pole plug or up to three one-pole plugs |  |
| 3007827 | Earthing and short-circuiting plug (EMC) | Allows earthing of either one three-pole plug, or up to three one-pole plugs |  |
| 3010158 | Three-pole plug (BTM) | Can be used to insulate any of the four three-pole IDR inputs |  |

MODULO

Plug in *TERMINAL* kit

WATERTIGHT TRANSFORMERS

Overview

The connection terminals allow connection of numerous cables, with the plug on the cable. It can receive all cables types, 6 to 35 mm².

For 3200 V, 5500 V, 6600 V networks:

- Belted cable
- Radial field cable
- One-pole twisted cable
- Two-pole cable

For 950 V network:

- U 1000 R2V cable or other

Electrical characteristics

Max. intensity : 100 A
Insulation class : 7.2 kV

Mechanical characteristics

The cable on the sealing sleeve has a maximum outer diameter of 48 mm (MODULO TRI)



Connection

By screw terminal



Please specify in the order:

- Cable type and cross section
- For special cable type please supply a sample

MODULO BI

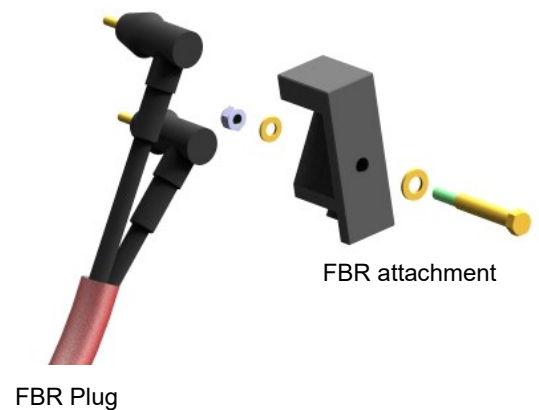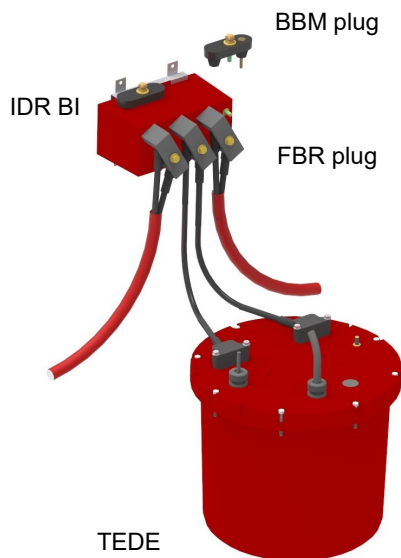

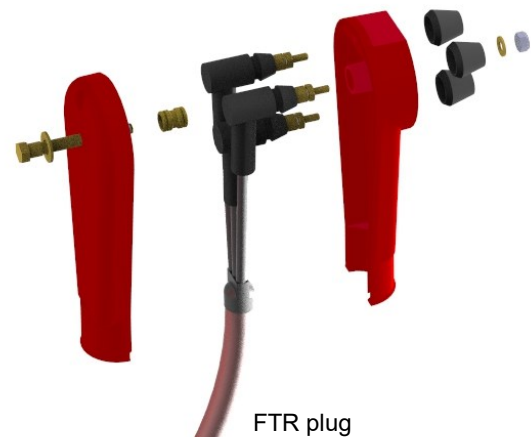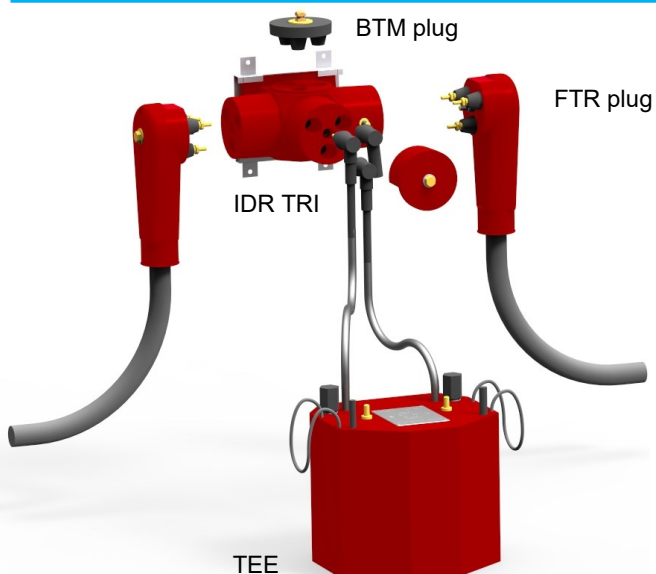


MODULO TRI




MODULO




SPARE PARTS ACCESSORIES

WATERTIGHT TRANSFORMERS


| Part number | Designation | Product |
|-------------|---|---|
| 3008122 | BI IDR FBR mounting plug |  |
| 3008105 | Socket for concentric two-pole cable, 6 to 25 mm ² |  |
| 3008354 | Socket for two one-pole cables 6 to 25 mm ² |  |




For IDR BI



| Part number | Designation | Product |
|-------------|---|---|
| 3008244 | Mounting plug for one-pole TRI IDR |  |
| 3007861 | Three-phase watertight cap |  |
| 3008788 | Socket for three-pole belting cable 6 to 25 mm ² |  |
| 3007867 | Socket for 3 one-pole cables 6 to 25 mm ² | |

For IDR TRI



| Part number | Designation | Product |
|-------------|--|---|
| 1017491 | Tube of silicon grease |  |
| 1026033 | Sealing cap |  |
| 3009136 | One-pole plug for TEE or TEDE |  |
| 1018116 | BBF, EMCB Mounting plate |  |
| 1017316 | Mounting plate for IDR BI, IDR TRI, BTF, EMC |  |

For both



CBT low voltage cabinet with circuit breaker

CBT IP67 Low voltage protection cabinet

Watertight ABS low voltage cabinet, corrosion resistant, for installation on the wall near the network transformer.

Made of a base and a cover closed by plastic screw. Grey cover.
Equipment options, depending on needs:

Circuit breaker cabinet:

One or several one-pole and neutral circuit breaker, two-pole or three-pole B curve, appropriate for the power rating transformer and dimension for supplying outdoor lighting lamps.

An MX trigger coil associated with a transformer thermal probe

Fuse cabinet:

A fuse with a neutral strip or multiple fuses

For all cabinet:

Direct connection on the circuit breaker terminal for U1000 R2V cable type or equivalent, maximum cable cross-section 25 mm²

One cable gland for the cable arriving at the transformer

One cable gland for thermal probe

One cable gland for output cable

| IP67 CBT cabinet for single-phase transformers | | | | | | | | | | |
|--|--|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| For transformer | 1 kVA | 2 kVA | 3 kVA | 5 kVA | 6 kVA | 8 kVA | 10 kVA | 16 kVA | 25 kVA | 32 kVA |
| One-pole circuit breaker + neutral B curve | 10 A | 16 A | 20 A | 32 A | 40 A | - | - | - | - | - |
| Two-pole circuit breaker B curve | 10 A | 16 A | 20 A | 32 A | 40 A | 50 A | 63 A | 100 A | - | - |
| Fuse rating GL curve | 6 A | 10 A | 16 A | 25 A | 32 A | 40 A | 50 A | 80 A | - | - |
| Dimensions for 1 circuit breaker or one fuse | 140 x 230 x 95 mm | | | | | | | | | |
| Dimensions for 2 circuit breakers | 280 x 190 x 130 mm | | | | | | | | | |
| Output cable gland | Diameter included between 11 and 17 mm (for a U1000 R2V cable, 2 x 6 or 2 x 10 mm ²) Other cable gland upon request | | | | | | | | | |

| IP67 CBT cabinet for three-phase transformers | | | | | | | | | | |
|---|--|--------|-------|--------|--------|-----------------|-------|-------|---------|---------|
| For transformer | 5 kVA | 10 kVA | 16kVA | 25 kVA | 32 kVA | 50 kVA | 63kVA | 80kVA | 100 kVA | 125 kVA |
| 4-pole circuit breaker B curve | 16 A | 32 A | 50 A | 80 A | 80 A | By consultation | | | | |
| Dimensions for 1 circuit breaker | 280 x 190 x 130 mm | | | | | | | | | |
| Dimensions for 2 circuit breakers | 280 x 280 x 130 mm | | | | | | | | | |
| Dimensions for 3 circuit breakers | 560 x 280 x 130 mm | | | | | | | | | |
| Output cable gland | Diameter included between 22 and 32 mm (for a U1000 R2V cable, 5G25 or 5G35) Other cable gland upon request | | | | | | | | | |

TER - MODULO

NETWORK INTERVENTION ACCESSORIES

WATERTIGHT TRANSFORMERS

The network intervention for each transformer must conform to the standards laid out in NF C17-200 and must use proper accessories.

The intervention procedure is laid out in our leaflet "Network intervention tools and methods."







Common intervention tools



| Part number | Designation |
|-------------|---|
| 1004588 | Pole insulating |
| 3010047 | Electronic voltage detector with sound signal for MV |
| 1019011 | Electronic voltage detector with sound signal for 950 V network |






Specific TER intervention tools


The voltage confirmation, earthing and short circuit operations are carried out on the one-pole connection interfaces.

| Part number | Designation | Use | Product |
|-------------|--|--|---|
| 3010354 | Operation key | Unscrew the cap to access the VAT compartment |  |
| 1023765 | Fuse extractor for 10x180 fuse | Remove the fuses |  |
| 3010902 | Fuse extractor for 20x127 fuse | |  |
| 1024130 | Fuse extractor for 36x190 or 36x250 fuse | |  |
| 3011866 | Earthing tools for single-phase network | Connect to the terminal jumper and earthing network (earthing cable 1x25 mm ²) |  |
| 3011208 | Earthing tools for three-phase network | |  |


Specific MODULO intervention tools

The voltage confirmation, earthing and short circuit operations are carried out on the IDR connection interfaces.

| Part number | Designation | Use | Product |
|-------------|--|--|---|
| 3007813 | CMB operation key | Unscrew the cap to access the VAT compartment |  |
| 3008056 | PMCB earthing and short circuiting plate | For BI IDR |  |
| 3007819 | PMC earthing and short circuit plate | For TRI IDR |  |
| 1004709 | Earthing strap | Attach the earthing plate to the earthing clamp |  |
| 1004711 | Earthing clamp | Connect the earthing network (1x25 mm ²) |  |



IDR BI



IDR TRI

CLA LIGHTING ARRESTERS

WATERTIGHT ARRESTERS FOR TER AND MODULO

WATERTIGHT TRANSFORMERS



Use

The CLA lighting arresters are specially made for installation in the pits closer to the transformers. They conform to current CEI standards, and are effective against overvoltage due to various causes, including atmospheric influences, static charges and lightning.

Advantages

A high margin of operating safety between the start-up voltage and the insulation level, with no inadvertent operation.

Maintenance optimization; the CLA can easily be added to existing installations, thanks to its standard connection adapted to all transformers.

Construction

The CLA is made of oxide and zinc non-linear resistors (varistors), protected by an epoxy glass laminate. The assembly is moulded in polyurethane. The ground connection is achieved via M12 dowel.

Technical characteristics

PERFORMANCES:

Protection grade : P68
 Operating temperature : 40 degrees C to +60 degrees C
 Earthing connection : M12

Connection:

TER:

Cable 1.5 m long equipped with a thimble to connect to the TER terminal

MODULO:

Cable 1.5 m long equipped with a one-pole plug, to connect to the IDR




CLA connected on IDR BI

| Model | CLA-10 | CLA-20 | CLA-30 |
|-------------------------------------|---------|---------|---------|
| Network voltage | 950 V | 3200 V | 5500 V |
| Permanent voltage service | 2.55 kV | 5.10 kV | 7.65 kV |
| Nominal voltage (current 1 mA) | 3 kV | 6 kV | 9 kV |
| Acceptable overvoltage (1s) | 3.4 kV | 6.8 kV | 10.2 kV |
| Surcharge nominal current | 10 kA | 10 kA | 10 kA |
| Residual voltage (10 kA surge 1 us) | 9 kV | 19 kV | 29 kV |
| Max. overcurrent (4/10 us) | 65 kA | 65 kA | 65 kA |
| Length (mm) | | 115 | |
| Width (mm) | | 85 | |
| Height (mm) | | 240 | |
| Weight (kg) | | 5 | |

TER - MODULO CONCRETE PITS

WATERTIGHT TRANSFORMERS




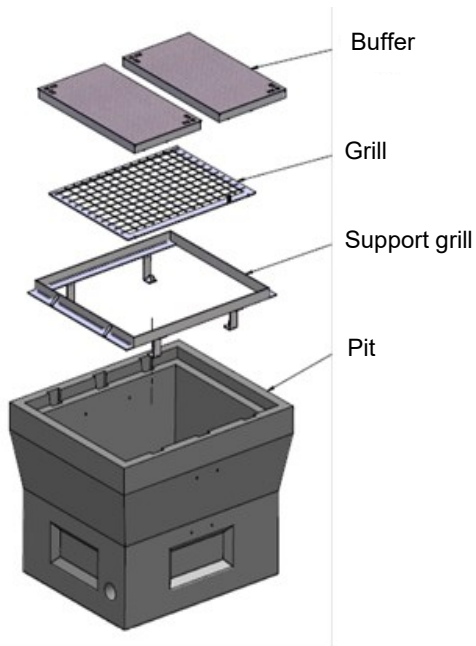


Watertight transformers can be installed in concrete pits. Pit bottom must include a water drainage system. The pit is to be buried near the receivers. The sleeves penetrating the pit must be closed to prevent water from entering.

The pit must be in accordance with the standards NF C17-200. Pit equipped with:

- One or more 250 kN buffers
- An articulated safety grill
- A grill support frame ready to seal
- Interlocking device (by nut) and poster set conforming to the standard NF C17-200. Interlocking can be realised on the grill or directly on the transformer

Recommended Posters

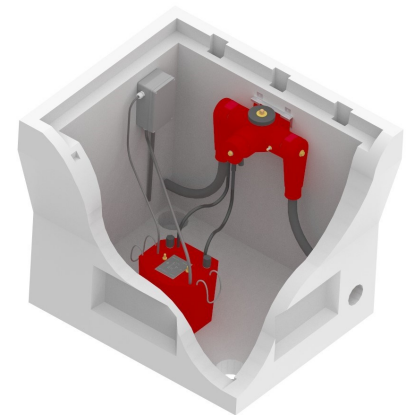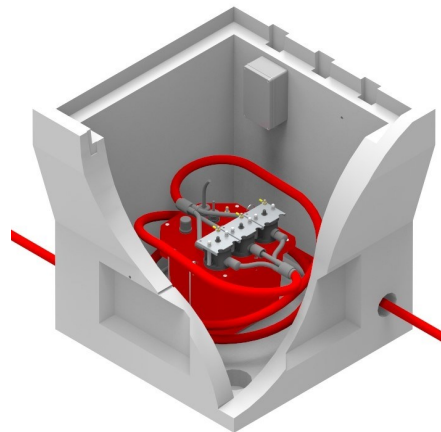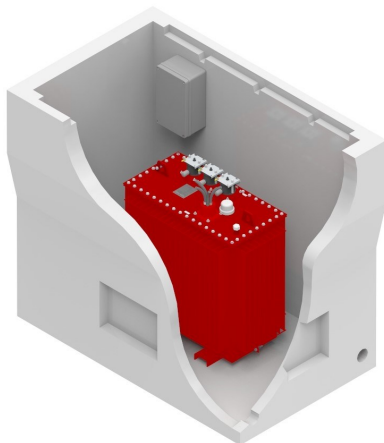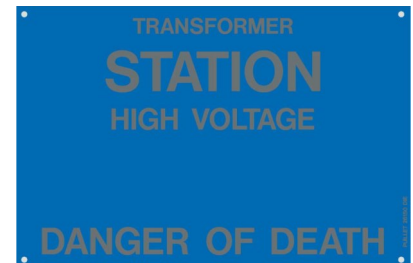


| Transformer | Power rating | Pit operating dimension (mm) | | |
|-----------------|---------------|------------------------------|------|------|
| | | L | I | H |
| TER M | 1 to 5 kVA | 800 | 800 | 840 |
| Modulo M | 1 to 5 kVA | | | |
| TER M | 6 to 10 kVA | 1000 | 800 | 840 |
| Modulo M | 6 to 10 kVA | | | |
| TER or Modulo M | 16 kVA | 1300 | 800 | 1100 |
| TER or Modulo T | 5 & 10 kVA | | | |
| TER or Modulo M | 25 & 32 kVA | 1700 | 1000 | 1300 |
| TER or Modulo T | 16 to 50 kVA | | | |
| TER or Modulo T | 63 to 100 kVA | 1900 | 1000 | 1500 |
| TER or Modulo T | 125 & 160 kVA | | | |

The 5500 V cable will have to loop around the TER transformer to make it possible to redo a plug-in terminal if necessary




Principle

A special key, which is recoverable at the transformer station after closing the earthing switch, allows access to the network transformers.

This interlocking system between the earthing section and the transformers allows safe operation. For the installation, a special key for each feeder will be associated with the locks bearing the same numbers, allowing access to all the transformer feeders. Numbers 11 to 52 are provided.

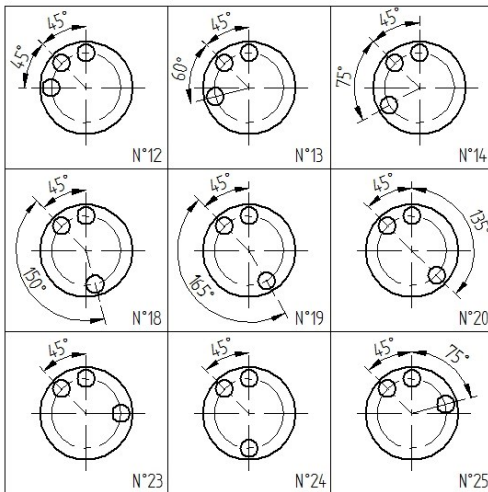



Examples of interlocking nut

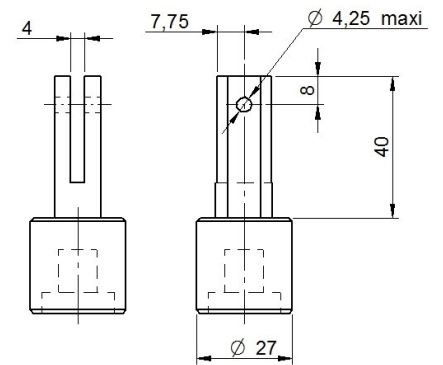

Pit interlocking

The special key activates nut (8) which releases the grid located in the interior of the pit (accessible through the access trap and the transformer).

Only the specific parts marked 6, 8 and 9 are listed in AUGIER's price lists.

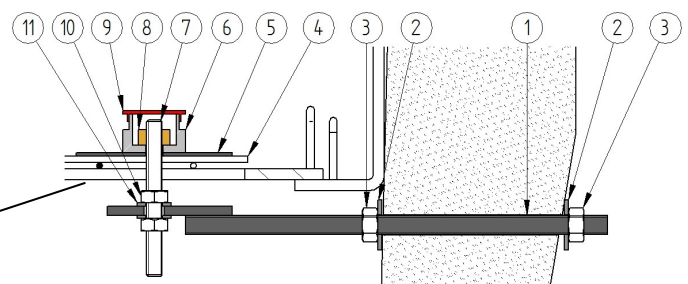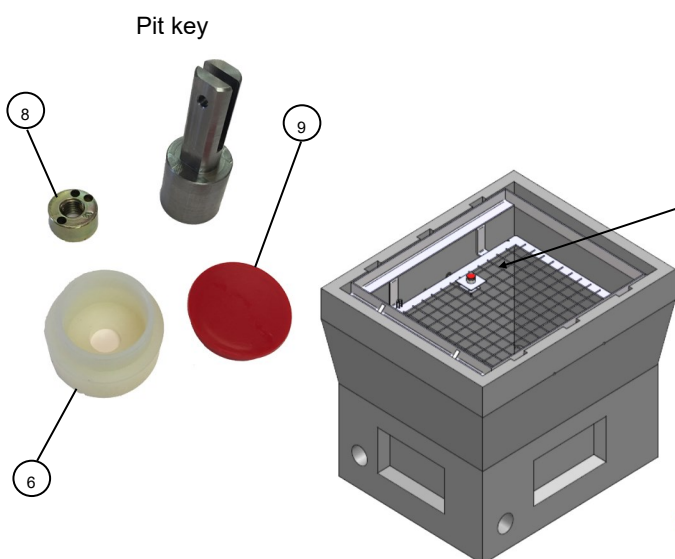


1. Fixation device
2. Stainless steel washer
3. Stainless steel M12 nut
4. Wire mesh
5. Platinum
6. Nylon cap
7. Threaded shaft
8. Special nut
9. Cap
10. Stainless steel M10 nut
11. Stainless steel washer




Transformer interlocking

Interlocking transformer terminals in TER transformers


Mechanical interlocking device available for areas directly accessible under voltage (terminals, fuse switches) on the TER transformer. This type of interlocking is used where the pit interlocking is not retained. The principle is the same as for the pit interlocking, with a secure nut.

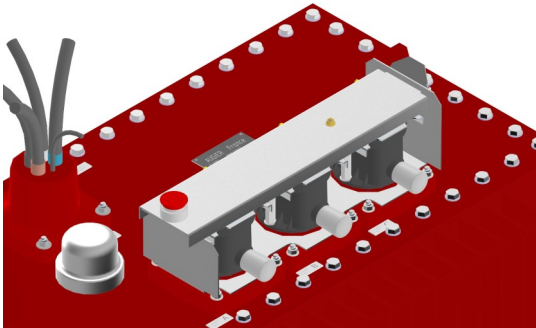

TER TT 50 kVA interlocking

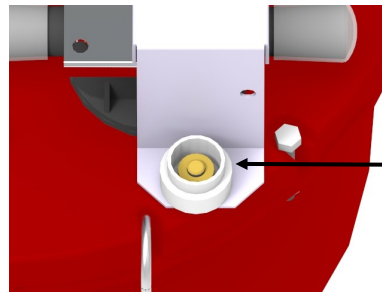


Detail of interlocking mechanism with special nut

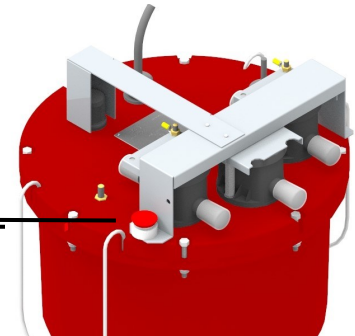


Interlocking TER MT 10 kVA

MODULO interlocking - Transformer and connection interface


Mechanical interlocking device available for fuse terminals directly on the transformer and a terminal interlocking device on the IDR connection terminal. The principle is the same as for the pit interlocking, with a security nut.

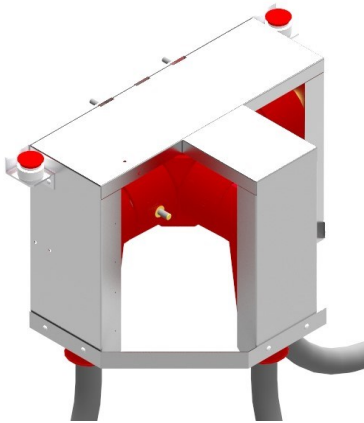

IDR TRI interlocking by nut

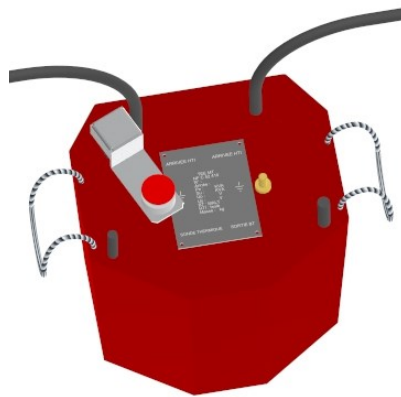

TEE interlocking by nut

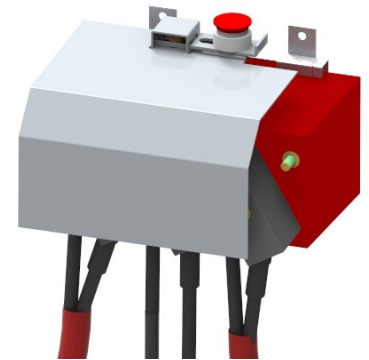


Detail TEE

Transformer installed in cabinet


AUGIER offers outdoor cabinets to accommodate watertight transformers. Cabinets made of aluminium sheet, RAL 1015, IP44, front closed by a door with a three-point lever handle.

Cabinet equipped with low-voltage connection terminals, a door contact. In the case of MODULO transformers, the connection interface is delivered mounted in the cabinet.

These cabinets are to be installed on a concrete slab, access to the transformer being possible after opening and grounding the upstream protection cell, locking by RONIS lock.

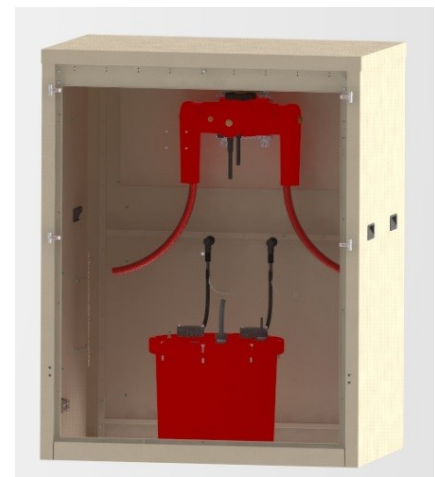

These tools are recommended for the MV or MLV cable heads for the TER and MODULO transformers.

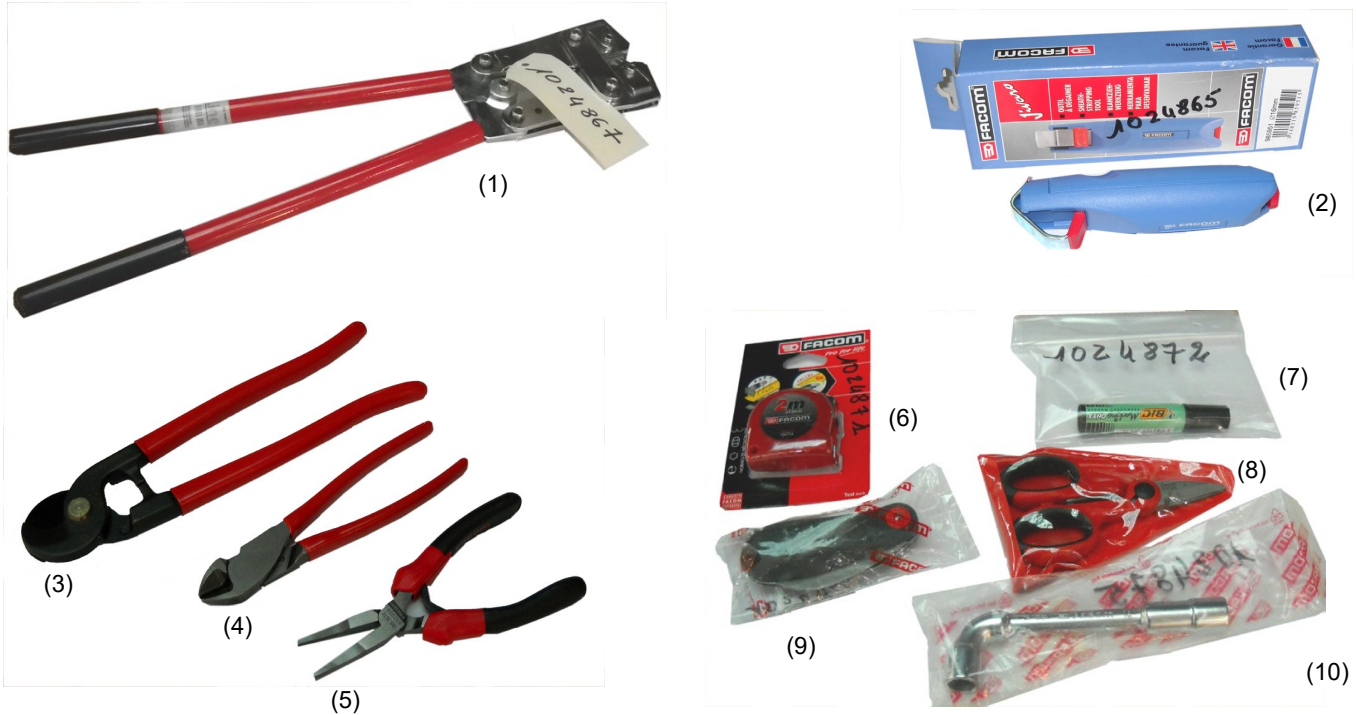

| Part number | Indication | Product name |
|-------------|------------|---|
| 1024867 | (1) | Clamping tool for cable cross-section 6 to 50 mm ² |
| 1024865 | (2) | Stripping tool |
| 1024864 | (3) | Cable cutter |
| 1024868 | (4) | Cutting pliers |
| 1024869 | (5) | Flat nosed pliers |
| 1024871 | (6) | Tape measure |
| 1024872 | (7) | Indelible marker |
| 1024870 | (8) | Scissors |
| 1024866 | (9) | Electrician's knife |
| 1024875 | (10) | Pipe wrench no. 13 |
| | (10) | Pipe wrench no. 16 (BI and TRI IDR) |
| 1026593 | (11) | Tool for peeling the semiconductor |
| 1028713 | (12) | Tool for stripping a one-pole cable |
| 1028714 | (13) | Hot air gun |



* To be used in the case of bonded semiconductor

Photos not contractual

Voltamax

240 VA 950 V / 230 V

WATERTIGHT TRANSFORMERS

The VOLTAMAX is an IP68 water-resistant transformer intended for use on 950 V networks. VOLTAMAX transformers are used to supply outdoor lighting and all other receivers.

These transformers can be supplied alone for easy integration directly into the lighting source, or in a pit. They can also be supplied cables in an IP55 cabinet.

The VOLTAMAX is designed for single or three-phase networks:

- Voltamax single-phase for single-phase network (M)
- Voltamax single-phase for three-phase network (T)

The VOLTAMAX allows

- Fewer cable cross-sections due to use of a 950 V network
- Absence of LV 230 V sub-networks
- Easy integration on 950 V networks
- Simple installation

The use of epoxy resin guarantees the transformers will be:

- **Non corrosive, with no change over time**
- **Water resistant and immersible**
- **Insulating**




Voltamax in cabinet



- Grey wall cabinet, IP55
- Equipped with a Voltamax, 950 V terminals, LV 230 V circuit breaker
- Dimensions: Height 400 x length 300 x depth 200 mm
- Approximate weight: 8 kg

950 V connection



950 V connection on terminals protected by a transparent lid, for use with a U1000 R2 V cable or equivalent of 6 to 25 mm². Terminals allow switch-off of the 950 V network artery.

Equipped with 950 V connection terminals, which can be supplied with just a Voltamax in order to facilitate implementation.

Voltamax

TECHNICAL CHARACTERISTICS

WATERTIGHT TRANSFORMERS

Electrical characteristics

Voltamax 150 M / T


| | |
|-----------------------------------|--------------|
| Nominal power rating (VA) | 240 |
| Fuse rating 950 V FU (A) | 6,3 |
| Frequency (Hz) | 50 |
| Primary voltage | 950 |
| Off load secondary voltage | 237 |
| On load secondary voltage | 230 |
| Isolation voltage | 1100 |
| Coupling | Single-phase |
| Off load losses | 2 W |
| On load losses | 14 W |
| Short circuit voltage | 3.96% |
| Transformer efficiency | 94% |
| Operating temperature (degrees C) | -15 / + 40 |
| Overheating class | H |

VOLTAMAX 150 M

For 950 V single-phase networks, used for power supply receivers up to 240 VA.

VOLTAMAX 150 T


For 950 V three-phase networks, used for power supply receivers up to 240 VA.

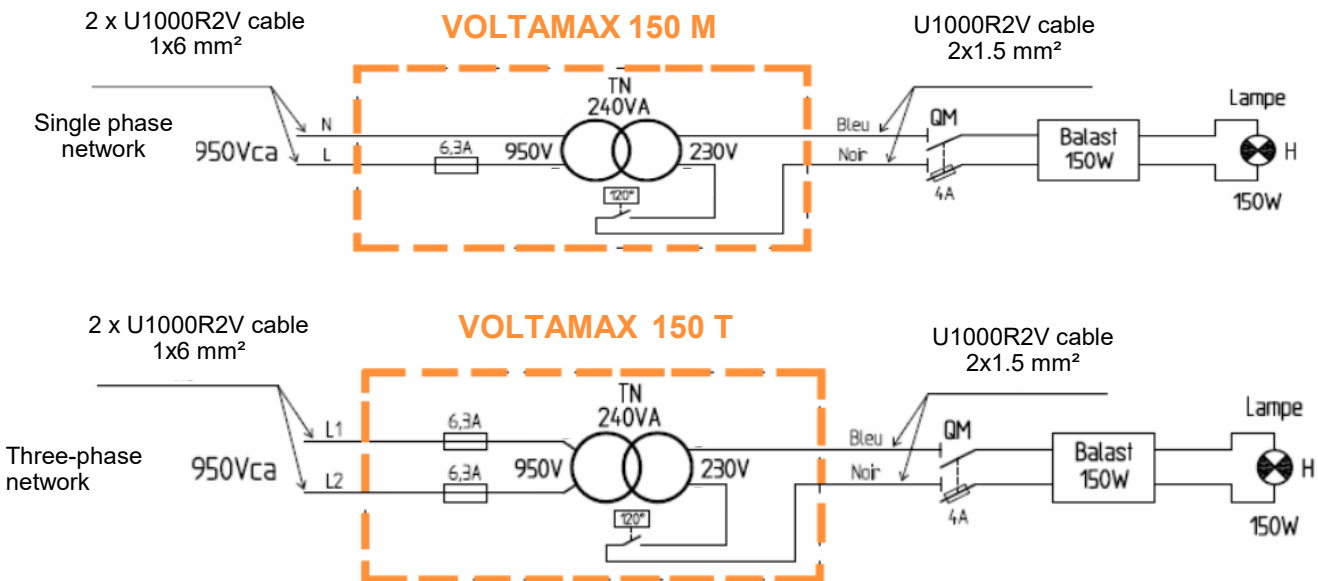

Mechanical characteristics


150 M / T

| | |
|--|----------------------|
| Height (mm) | 250 |
| Length (mm) | 141 |
| Width (mm) | 82 |
| Mass (kg) | 6 |
| Attachment | 4 M6x10 screw |
| Cable cross-section 950 V (mm ²) | 2x1x6 - 1 meter long |
| Cable cross-section 230 V (mm ²) | 2x1,5 - 1 meter long |
| IP protection grade | 68 |
| IK protection grade | 10 |

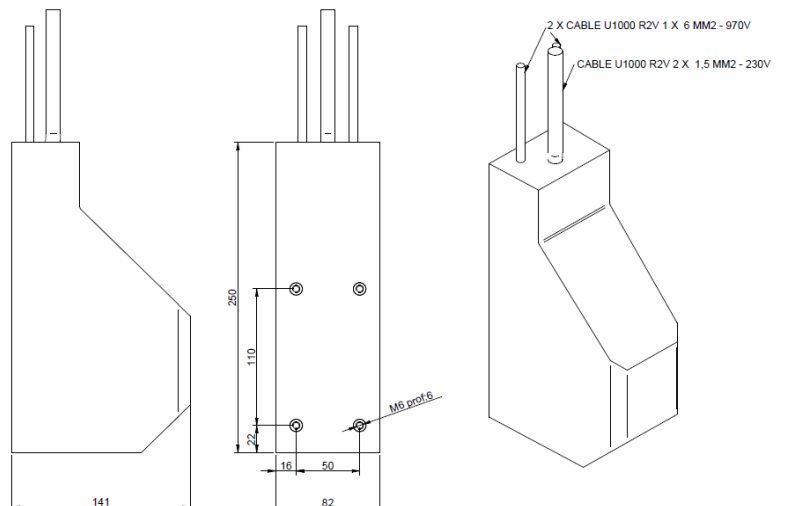

950 V Network

U 1000 R2V 1000 V cable

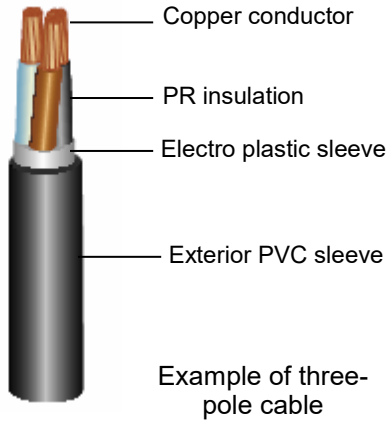

| Cable cross-section (mm ²) | Max. diameter of isolating sleeve (mm) | Approx. diameter at outer sleeve (mm) | Admissible intensity (A) |
|--|--|---------------------------------------|--------------------------|
| | | | Buried |
| 3 x 6 | 4.3 | 15 | 66 |
| 3 x 10 | 5.1 | 17 | 87 |
| 3 x 16 | 6.1 | 19.5 | 113 |
| 3 x 25 | 7.8 | 23.5 | 144 |
| 3 x 35 | 8.8 | 26 | 174 |
| 3 x 50 | 10.2 | 29 | 206 |


Curved ribbon: 6 x diameter

These cables should conform to the following standards:

Regulation : NF C32-321
 Class : 1 kV
 Conductor : class 2

3200 V Single-phase network

Two-pole concentric 3.6 / 6 kV - with or without shield

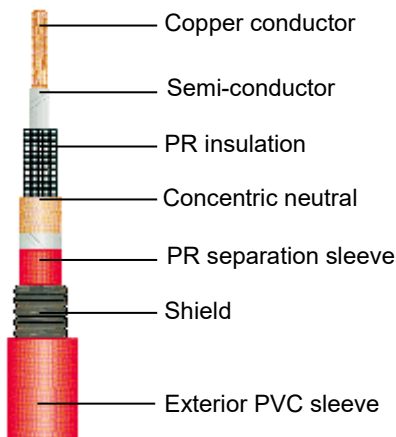

| Cable cross-section (mm ²) | Max. diameter on isolating sleeve | Approx. diameter at outer sleeve (mm) | | Admissible intensity (A) Buried |
|--|-----------------------------------|---------------------------------------|--------------------------|---|
| | | Cable without shield | Cable with shield | |
| 6 + 6 | 16 | 18.6 | 19.6 | 63 |
| 10 + 10 | 16.5 | 19.2 | 20.2 | 90 |
| 16 + 16 | 18.3 | 21 | 22 | 115 |
| 25 + 25 | 20.5 | 23.2 | 24.2 | 150 |


Curved ribbon: 10 x diameter

These cables should conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

5500 V / 6600 V Network

Three-pole belting cable, non-radial shielded cable 6/6 kV

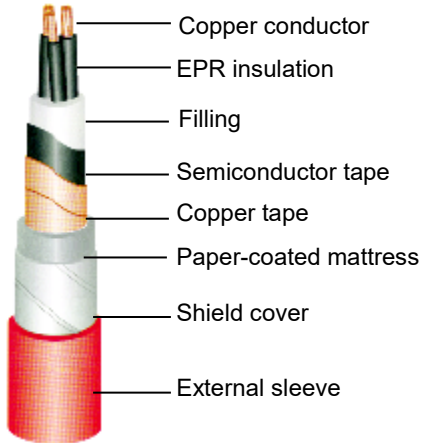

| Cable cross-section (mm ²) | Max. outer diameter (mm) | Admissible intensity (A) | |
|--|--------------------------|--------------------------|----------|
| | | Buried | Open air |
| 3 x 10 | 33 | 72 | 62 |
| 3 x 16 | 35 | 94 | 81 |
| 3 x 25 | 39.5 | 120 | 105 |
| 3 x 35 | 43 | 145 | 130 |


Curved ribbon: 9 x exterior diameter

These cables should conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

5500 V / 6600 V Network

Twisted three-pole cable 3.6/6 kV

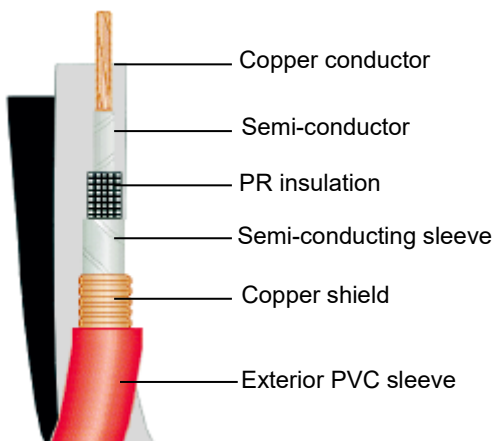

| Cable cross-section (mm ²) | Max. exterior diameter (mm) | | Admissible intensity (A) | |
|--|-----------------------------|-------|--------------------------|----------|
| | Sleeve | Twist | Buried | Open air |
| 3 x 1 x 10 | 18 | 36 | 97 | 92 |
| 3 x 1 x 16 | 19.6 | 39.5 | 125 | 120 |
| 3 x 1 x 25 | 21.2 | 42.5 | 160 | 155 |
| 3 x 1 x 35 | 22.4 | 45 | 190 | 190 |

Curved ribbon: 9 x exterior diameter

These cables conform to the following standards:

Regulation : NF C33-321
 Class : 7.2 kV
 Conductor : class 2

AUGIER HAS BEEN ISO 9001 CERTIFIED SINCE 1995



Dealer contact information:

60.12202 With constant improvements, the manufacturer may alter information without prior warning



Zone Industrielle de Carros - 1ère avenue, 13ème rue, n°3890 - 06510 Carros - France
+33 4 92 08 62 00 | Contact@augier.com | www.augier.com